




- REVISIONS -							
ZONE	REV	DESCRIPTION	CHG BY	CHK BY	APP BY	REL BY	DATE
-	A	ADDED TEE FOR 3PS DOWNSTREAM FROM PURGE SAVER.	MHO	DEH	DEH	SDM	04/05/06
-	B	ADDED TEE FOR 3PS DOWNSTREAM FROM PURGE SAVER IN REAR VIEW.	MHO	DEH	DEH	SDM	04/10/06
-	C	CHANGED FILTER PACKAGES.	SDM	DEH	DEH	SDM	10/10/06
-	D	REMOVED UNNEEDED DETAIL A	DL	DEH	DEH	SDM	02/22/07
-	E	CHANGED ASME RELIEF VALVE	LLS	SDM	SDM	SDM	02/19/08
-	F	CHANGE ELECTRIC PANEL & VALVE	CPG	DPM	DEH	SDM	06/15/10
-	G	CHANGE MUFFLER TO CORRECT ONE	AMS	CPG	DEH	CRH	11/22/10
-	H	ROTATE MUFFLER AND DEPRESS VALVE PIPING	GMJ	CPG	DEH	CRH	02/18/11
-	I	REMOVED FRONT, BACK & INNER ANGLES OF DRYER	SKN/BEK	DEH	DEH	SKN/BEK	04/09/18
B-4	J	ADDED SINGLE PROBE DUAL RTD/THERMOCOUPLE	SOM/BEK	KL	DEH	SOM/BEK	05/30/19

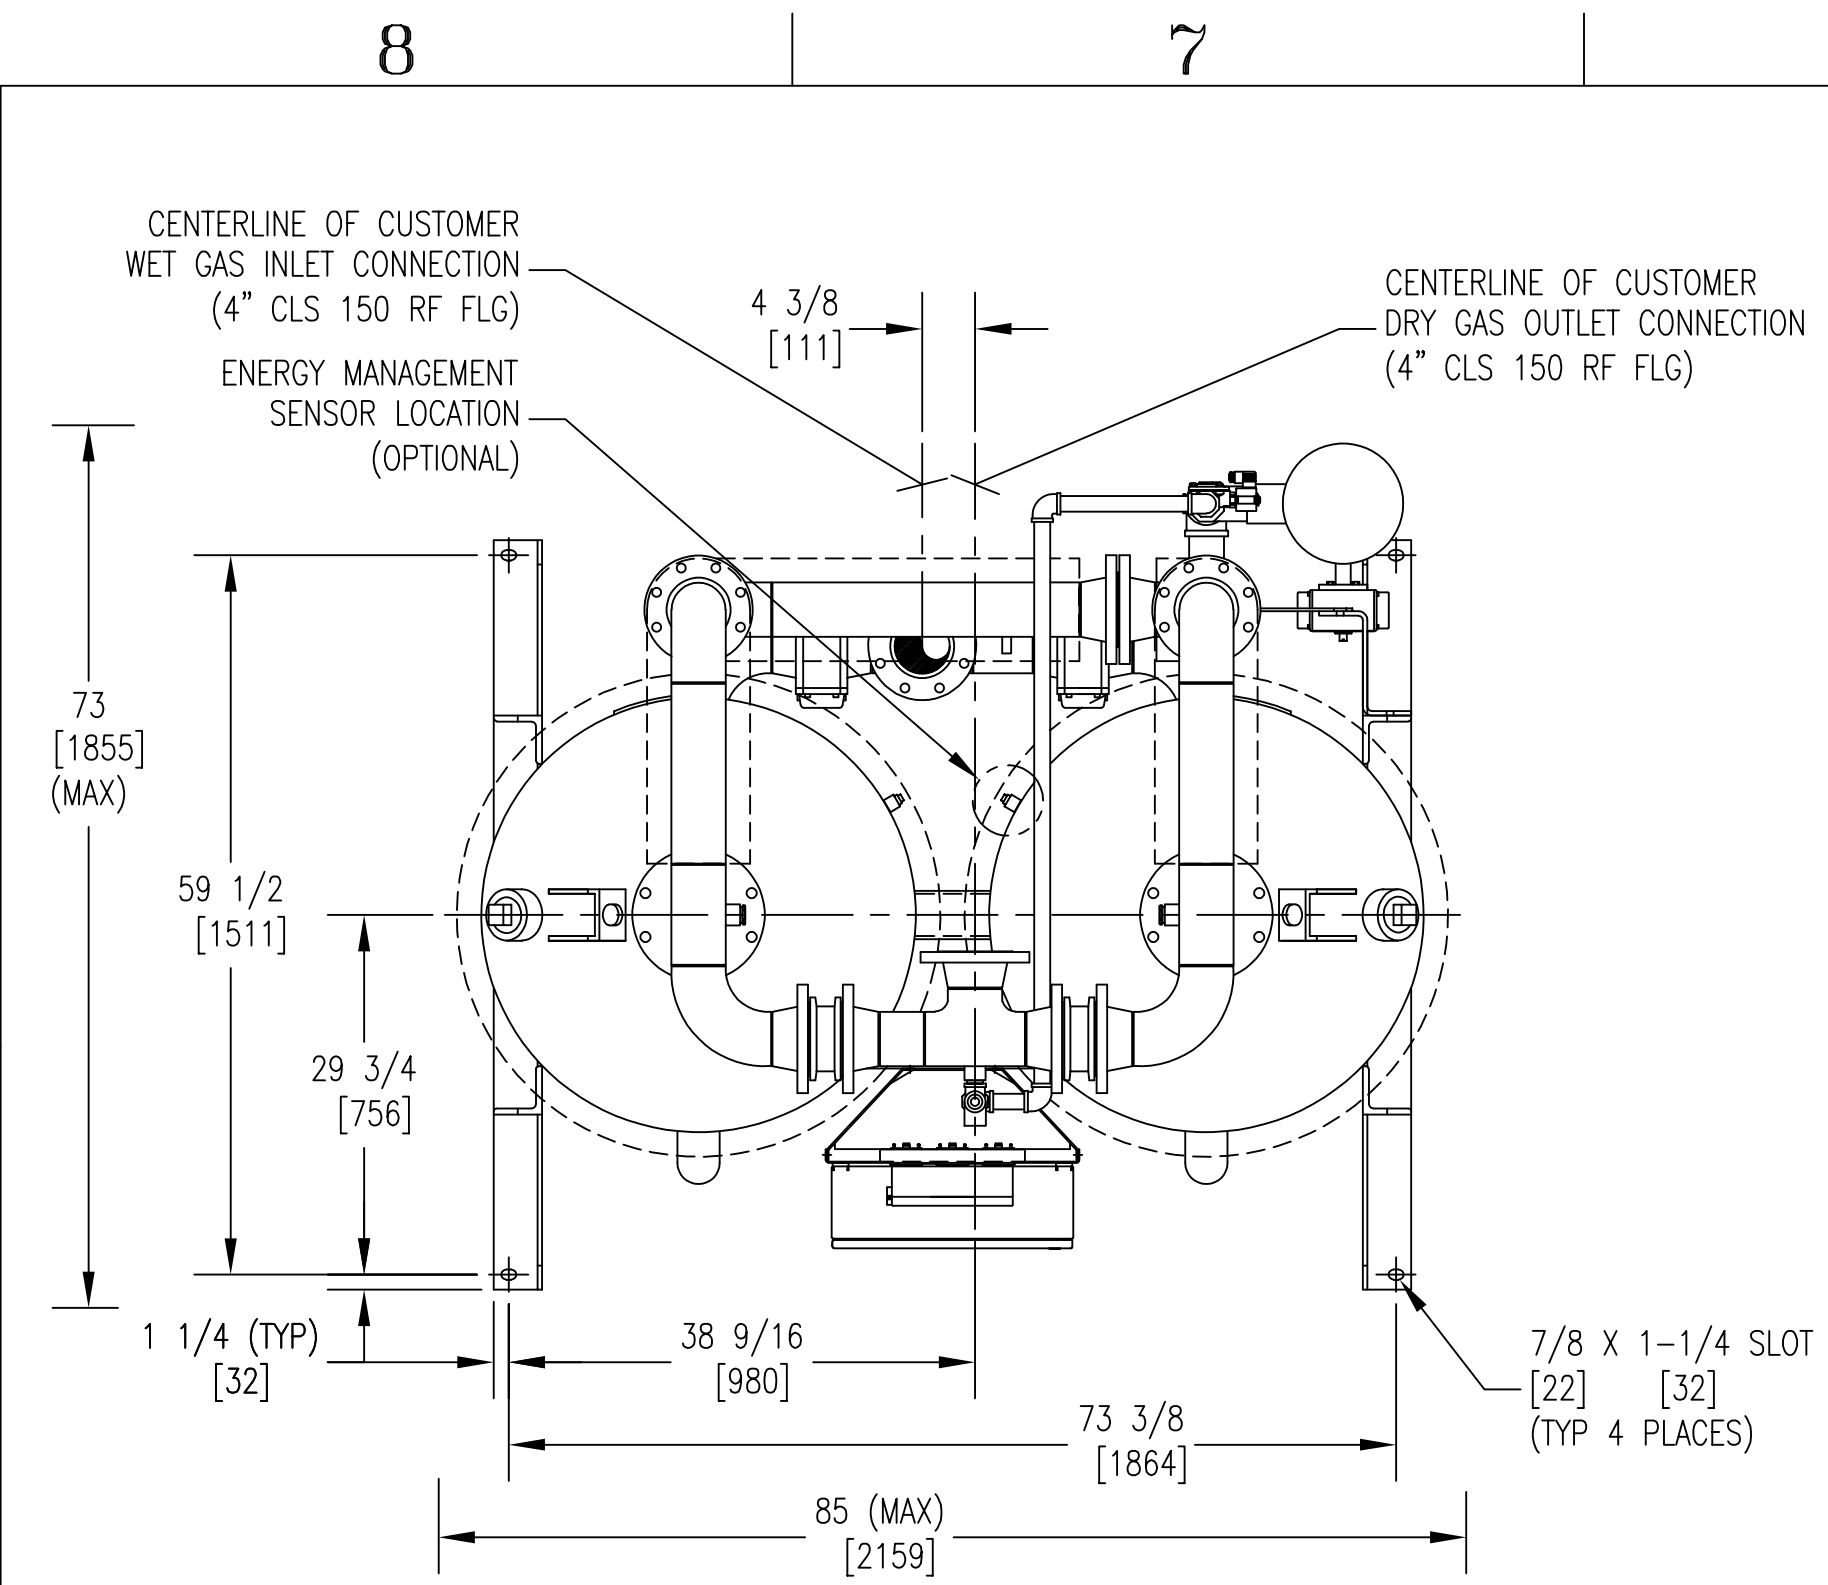


TOP VIEW

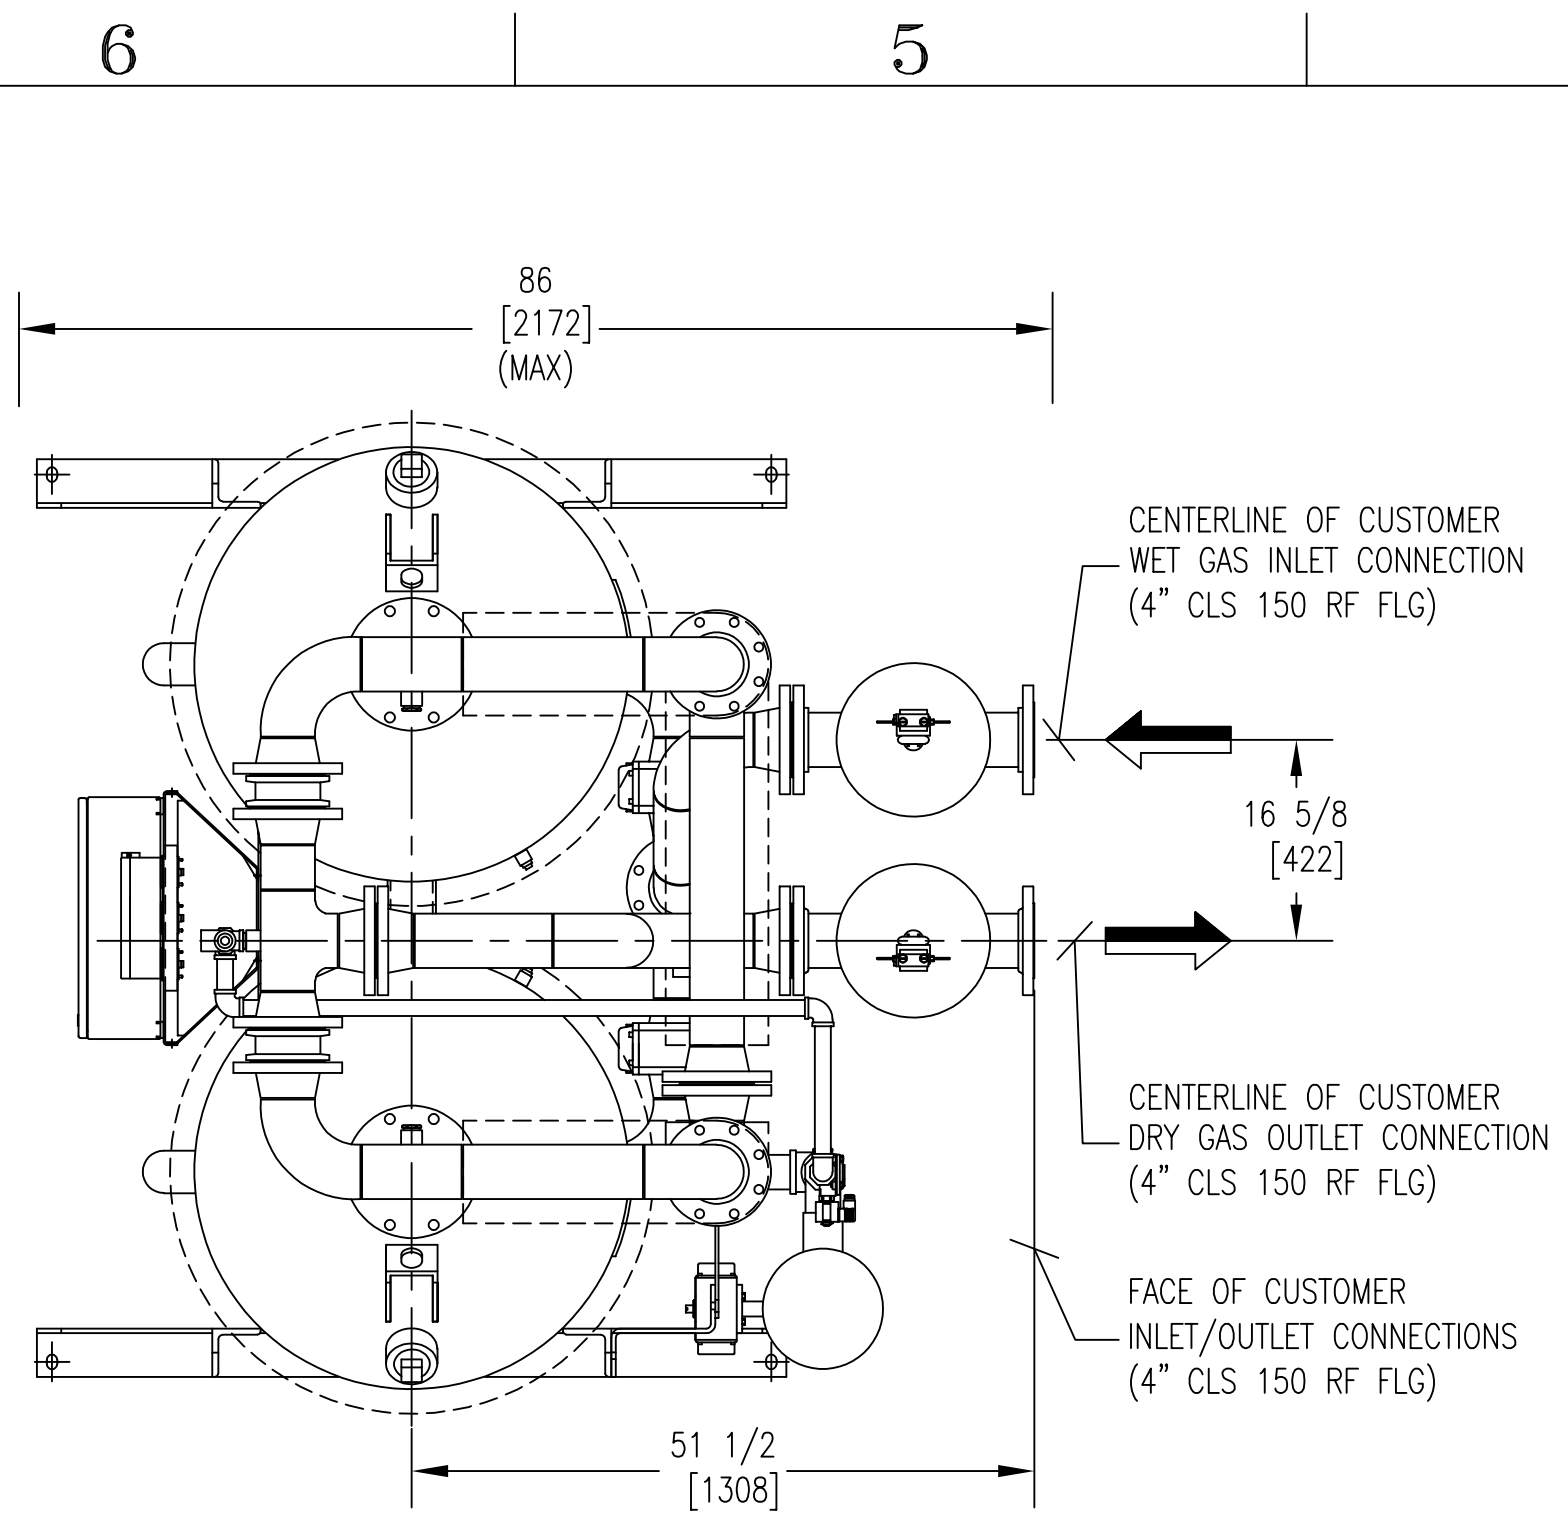


TOP VIEW  
(F01 PKG OPTIONAL)

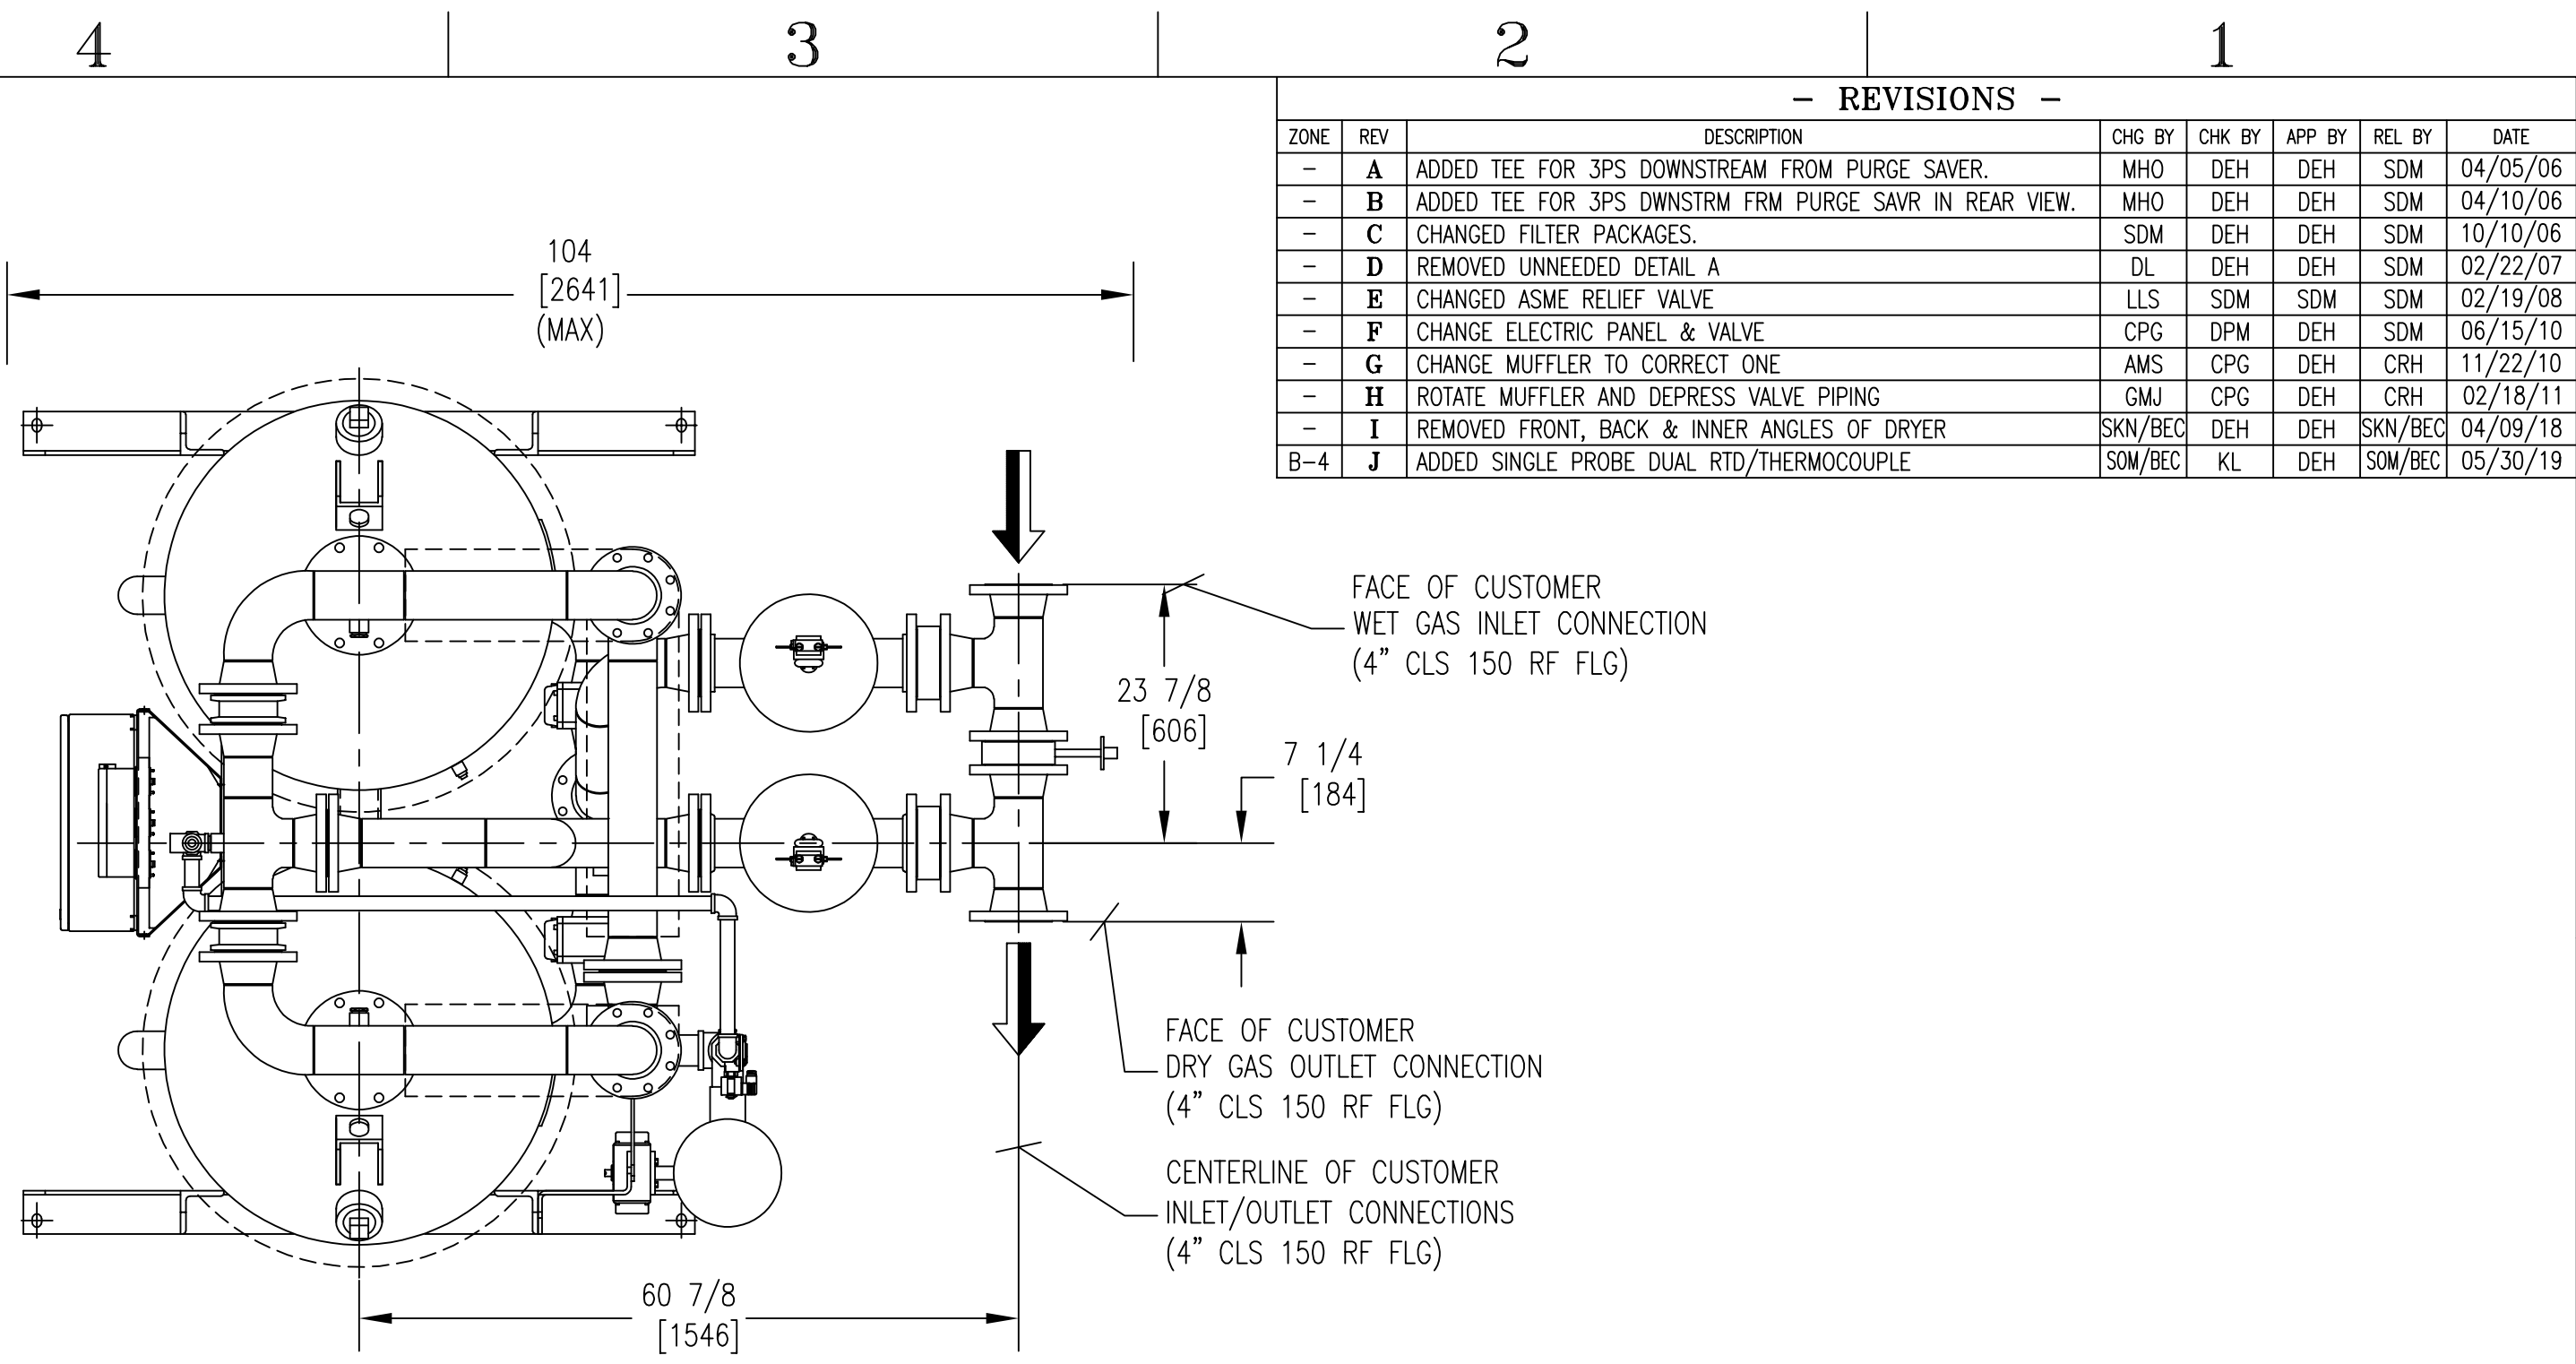


TOP VIEW  
(F02 PKG OPTIONAL)

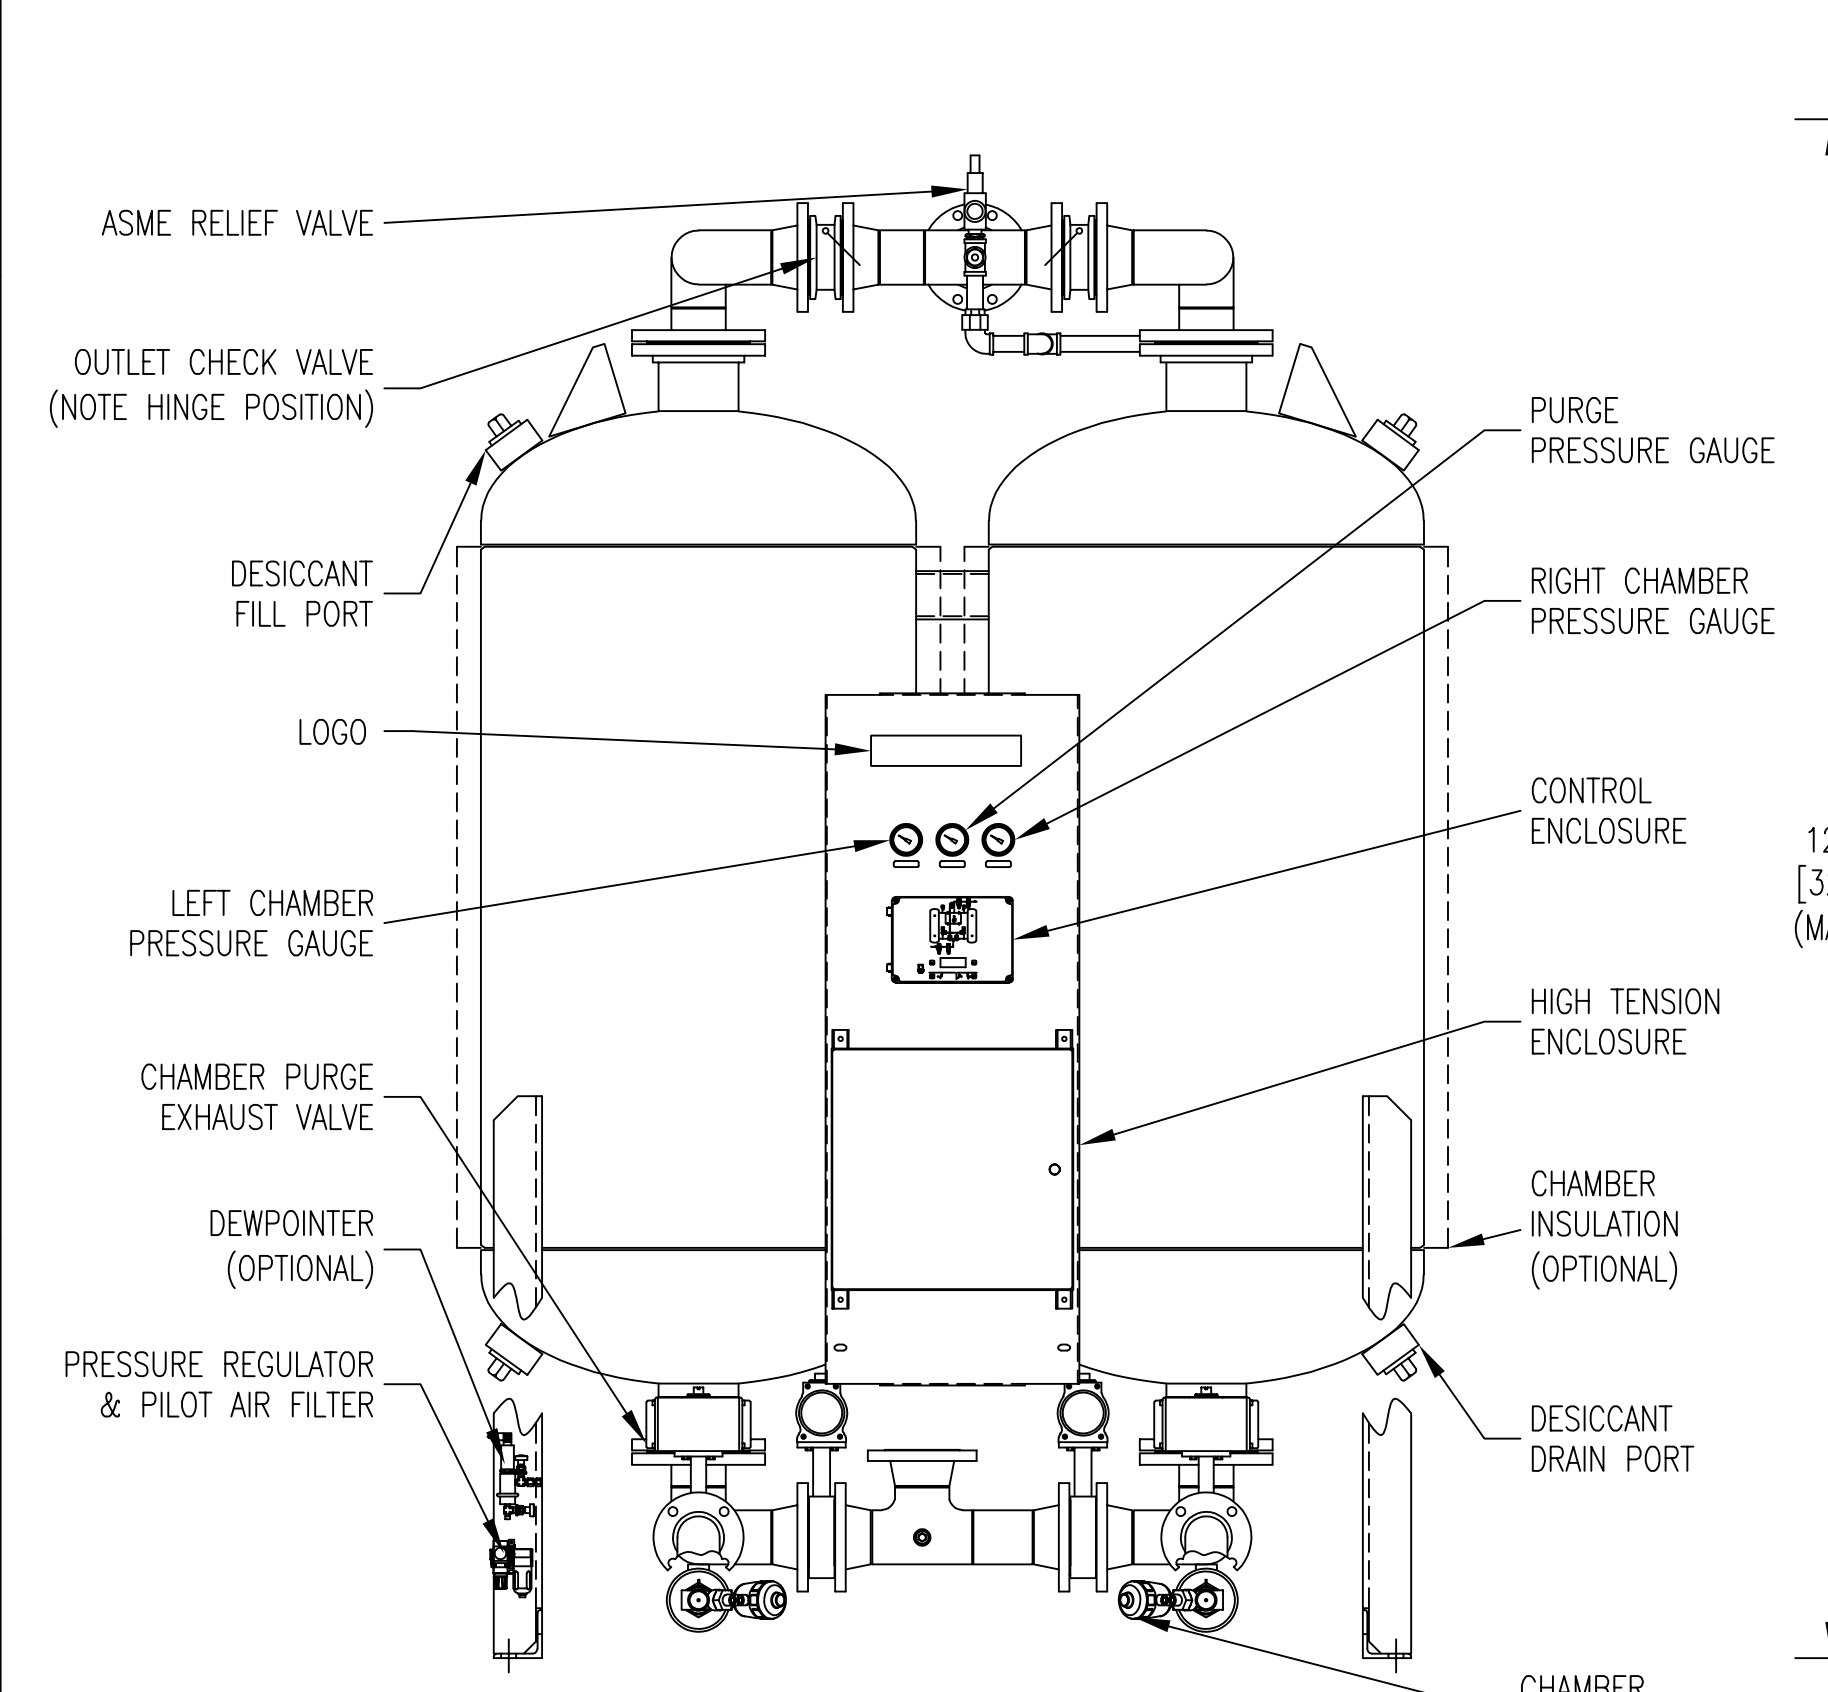

FRONT VIEW

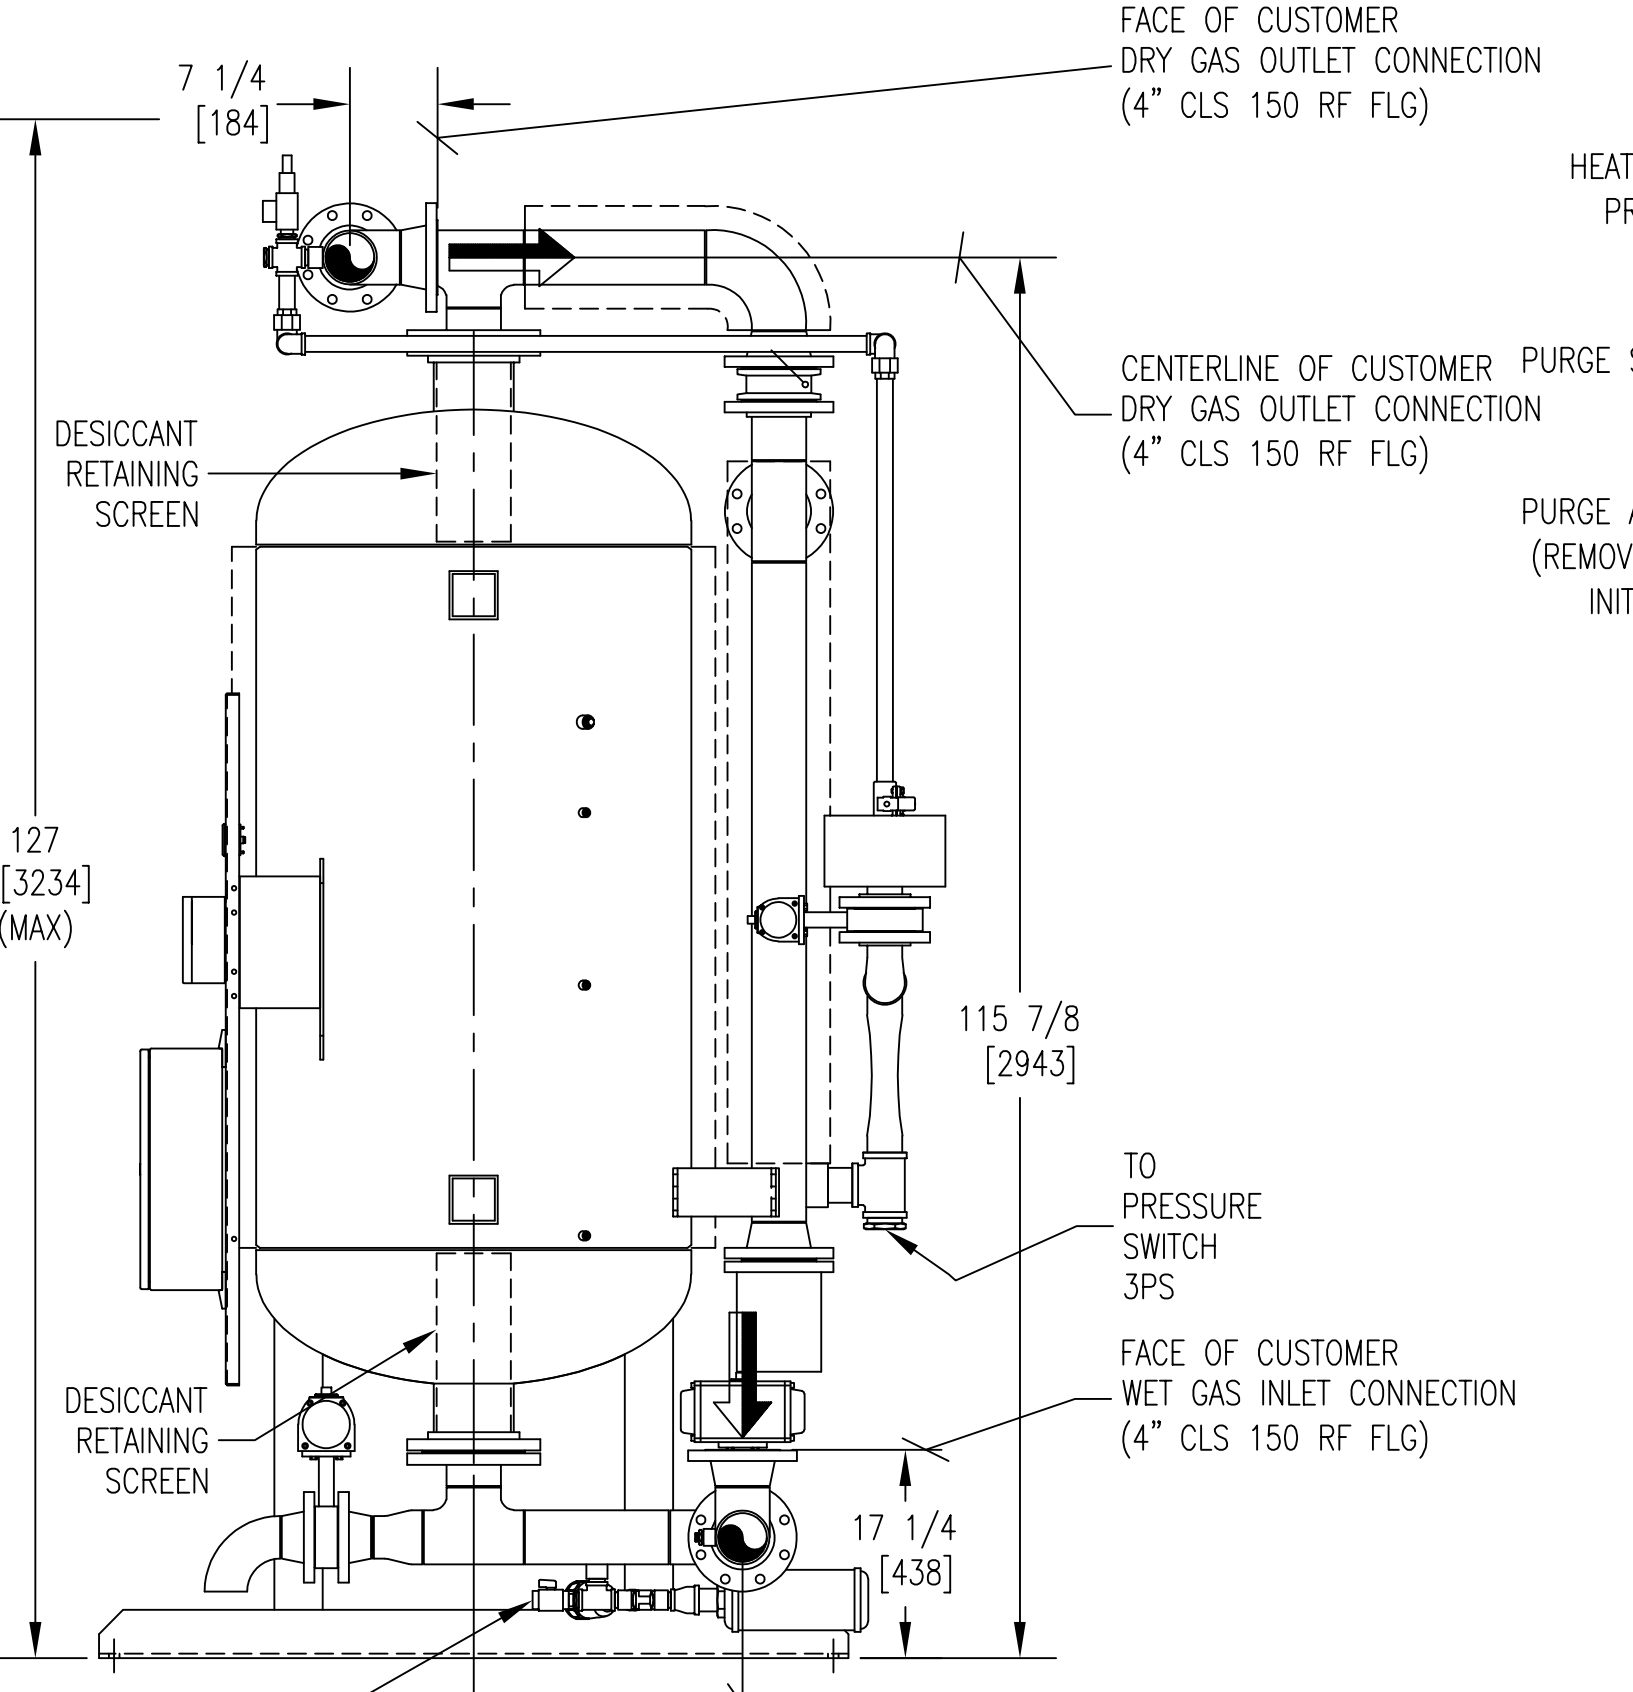

SIDE VIEW  
(RIGHT CHAMBER REMOVED FOR CLARITY)

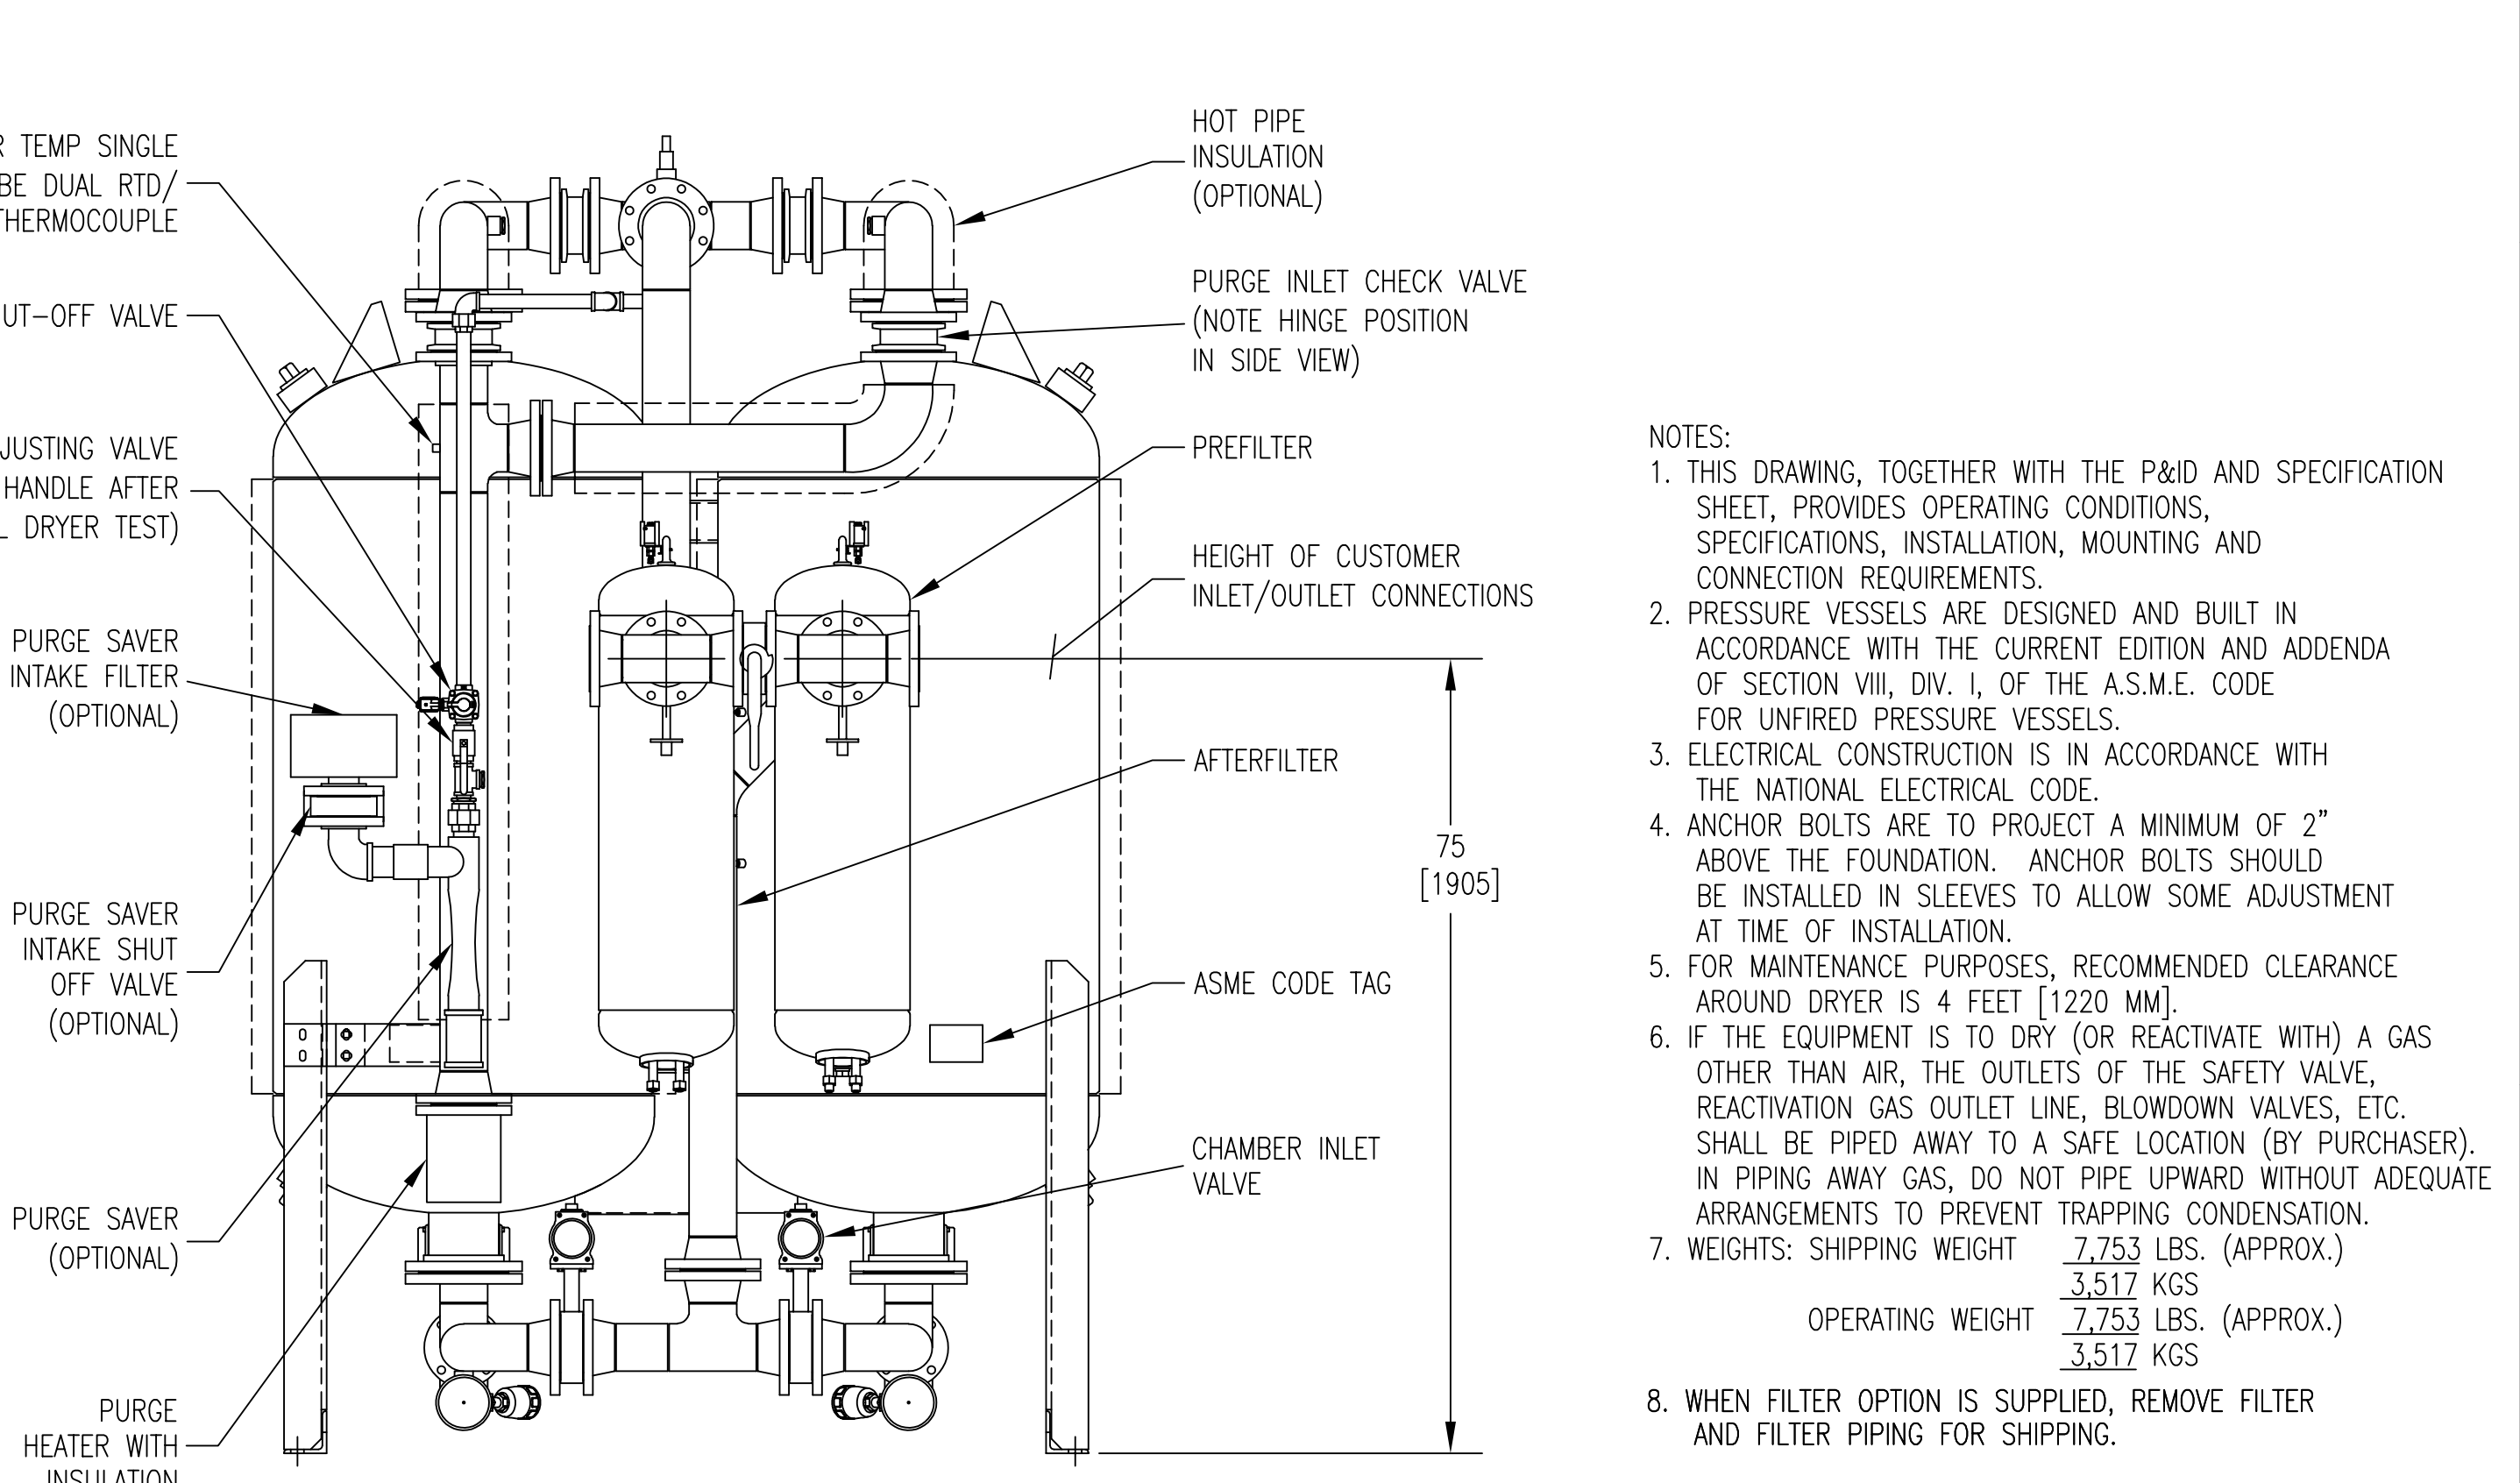

REAR VIEW  
(F01/F02 PKG OPTIONAL)

- NOTES:
- THIS DRAWING, TOGETHER WITH THE P&ID AND SPECIFICATION SHEET, PROVIDES OPERATING CONDITIONS, SPECIFICATIONS, INSTALLATION, MOUNTING AND CONNECTION REQUIREMENTS.
  - PRESSURE VESSELS ARE DESIGNED AND BUILT IN ACCORDANCE WITH THE CURRENT EDITION AND ADDENDA OF SECTION VIII, DIV. I, OF THE A.S.M.E. CODE FOR UNFIRED PRESSURE VESSELS.
  - ELECTRICAL CONSTRUCTION IS IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE.
  - ANCHOR BOLTS ARE TO PROJECT A MINIMUM OF 2" ABOVE THE FOUNDATION. ANCHOR BOLTS SHOULD BE INSTALLED IN SLEEVES TO ALLOW SOME ADJUSTMENT AT TIME OF INSTALLATION.
  - FOR MAINTENANCE PURPOSES, RECOMMENDED CLEARANCE AROUND DRYER IS 4 FEET [1220 MM].
  - IF THE EQUIPMENT IS TO DRY (OR REACTIVATE WITH) A GAS OTHER THAN AIR, THE OUTLETS OF THE SAFETY VALVE, REACTIVATION GAS OUTLET LINE, BLOWDOWN VALVES, ETC. SHALL BE PIPED AWAY TO A SAFE LOCATION (BY PURCHASER). IN PIPING AWAY GAS, DO NOT PIPE UPWARD WITHOUT ADEQUATE ARRANGEMENTS TO PREVENT TRAPPING CONDENSATION.
  - WEIGHTS: SHIPPING WEIGHT 7,753 LBS. (APPROX.)  
OPERATING WEIGHT 3,517 KGS (APPROX.)  
3,517 KGS (APPROX.)
  - WHEN FILTER OPTION IS SUPPLIED, REMOVE FILTER AND FILTER PIPING FOR SHIPPING.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	UNAUTHORIZED USE, MANUFACTURE, OR REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED. DRAWING DESIGN AND OTHER DISCLOSURES ARE PROPERTY OF:
DIMENSIONS ARE IN: INCHES/MM	DWN BY	SDM	12/23/04	<b>Deltech</b>
SURFACE FINISH: N/A ✓	ENG BY	DEH	12/23/04	
TOL.	MM	INCHES	CHK BY	SDM
.X	-	-	APP BY	DEH
.XX	-	-	REL BY	SDM
.XXX	-	-	MAT NO.	----
FRACT: ±1/2	ANG: ±2°	SIZE	DWG. NO.	0027008-2200
SCALE: 1/16	WT: N/A	REV.	SHEET	J 1/1

GENERAL ARRANGEMENT  
RP 2200