


# Specifications

<b>Port Sizes</b>	1¼", 1½", 2"
<b>Thread Styles</b>	NPT, BSPT, BSPP
<b>Flow Capacity</b>	300/400/700 SCFM @ 100 PSI
<b>Filter Capacity</b>	3.0 micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max. Temp./Pressure (Aluminum Bowl)</b>	175 °F/200 PSIG
<b>Approx. Weight (lb.)</b>	30.0
<b>ISO Class</b>	3 Particulate

For higher pressure applications, consult factory. Units equipped with differential pressure indicator have max. temperature and pressure of 125 °F and 150 PSIG, regardless of bowl material.




**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

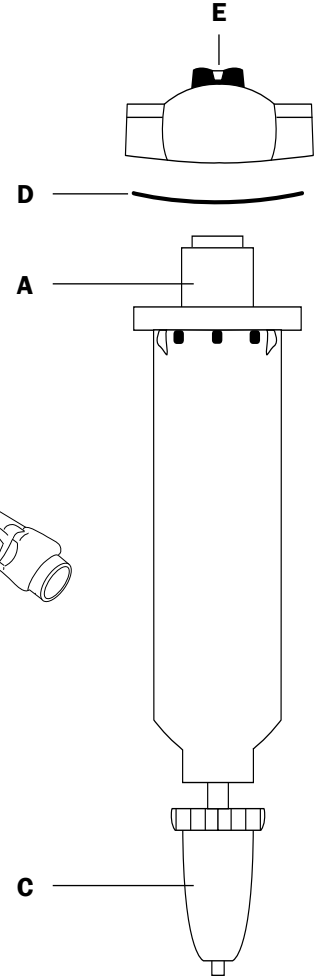

# Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element	1M-300/1M-400/1M-700
<b>B</b> Manual Drain, Ball Valve	BV-051
<b>C</b> External Automatic Float Drain	N32-95-XD8
<b>D</b> Bowl O-ring	N32-F35-OR
<b>E</b> Differential Pressure Indicator (Optional)	N32-W1-DPI



# Order Guide

Drain Type	Port Size	Model Number			Dimensions (in.)		
		Low Flow	Med Flow	High Flow	Height*	Width	Depth
Manual	1¼"	1M-300-M10-P	1M-400-M10-P	1M-700-M10-P	29.4	7.8	7.8
	1½"	1M-300-M12-P	1M-400-M12-P	1M-700-M12-P	29.4	7.8	7.8
	2"	1M-300-M16-P	1M-400-M16-P	1M-700-M16-P	29.4	7.8	7.8
External Automatic	1¼"	1M-300-M10-F	1M-400-M10-F	1M-700-M10-F	32.0	7.8	7.8
	1½"	1M-300-M12-F	1M-400-M12-F	1M-700-M12-F	32.0	7.8	7.8
	2"	1M-300-M16-F	1M-400-M16-F	1M-700-M16-F	32.0	7.8	7.8

\*To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)