



## AS-3D

### // 24 GALLON

|                |          |
|----------------|----------|
| <b>HP</b>      | 3        |
| <b>CFM</b>     | 11.3     |
| <b>Max PSI</b> | 130      |
| <b>dB(A)</b>   | 59       |
| <b>*Weight</b> | 260 Lbs. |
| <b>*Length</b> | 44"      |
| <b>*Width</b>  | 19"      |
| <b>*Height</b> | 43"      |

### // 51 GALLON




|                |          |
|----------------|----------|
| <b>HP</b>      | 3        |
| <b>CFM</b>     | 11.3     |
| <b>Max PSI</b> | 130      |
| <b>dB(A)</b>   | 59       |
| <b>*Weight</b> | 363 Lbs. |
| <b>*Length</b> | 56"      |
| <b>*Width</b>  | 24"      |
| <b>*Height</b> | 50"      |



## KEY FEATURES

- // Portable, Highly Maneuverable Corded Unit
- // Direct Drive Transmission
- // Compact, Low Profile Design
- // 230V (Available in Single or Three Phase)

\*\*Weight and Dimensions Reflect Wheel-Mounted Unit

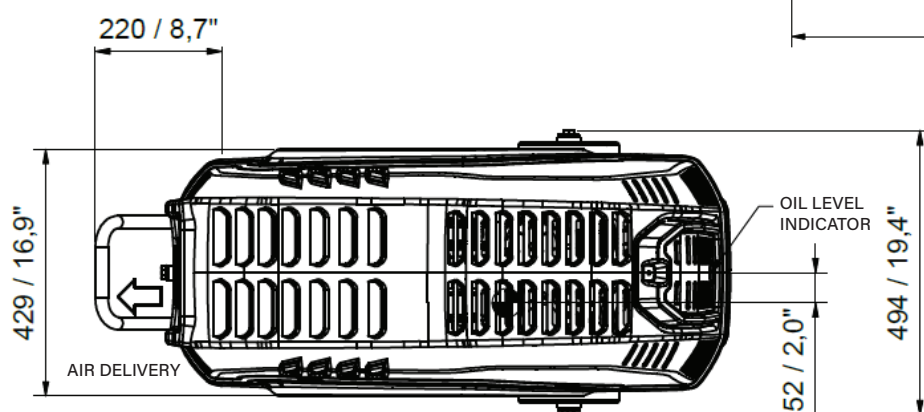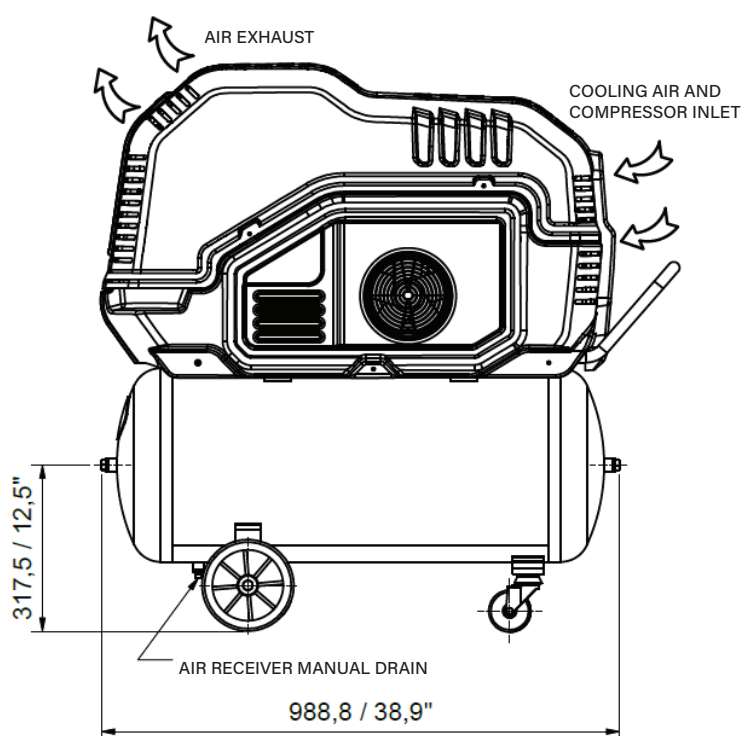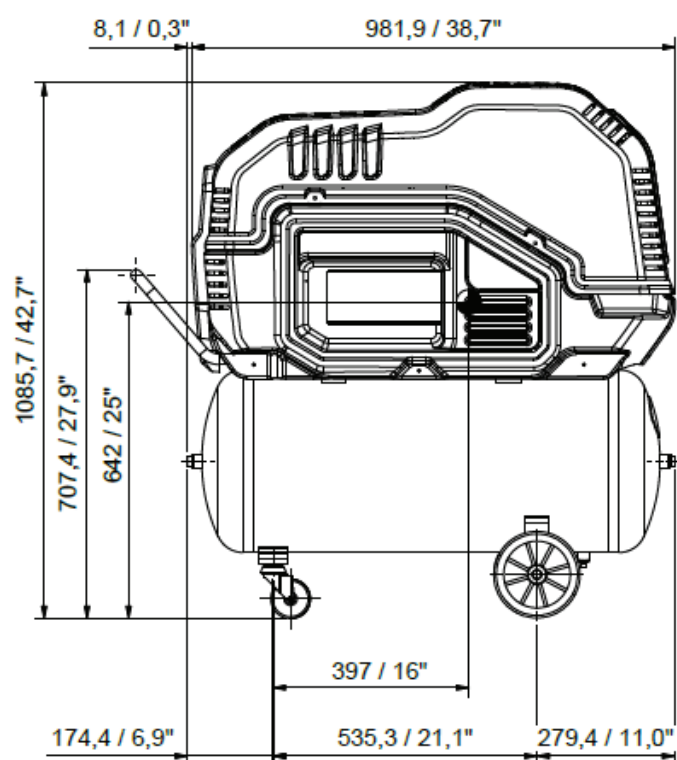

NOTES:

- 1) ALL DIMENSIONS GIVEN IN INCHES
- 2) ALLOW MINIMUM OF 12 MM/  
INCHES ON ALL SIDES FOR  
SERVICE AND COOLING
- 1) DIMENSIONS REFLECT AS-3D 24  
GALLON UNIT