

## Dual Tower Heat Regenerative Desiccant Air Dryers 100 to 6000 SCFM

Altec AIR's HRE Series Heat Regenerative Desiccant Air Dryers apply a regulated amount of dried process air, which has been heated by way of a low watt density heater, down through the desiccant bed (counter current). This heated purge air is then exhausted to atmosphere, removing the water vapor that had adhered to the desiccant during the previous cycle.

- ASME / CRN Approved Pressure Vessels
- Factory installed Filters w/ Differential Pressure Gauges and Pre-Filter Timer Drain
- Feature Rich ETL Listed Pro-Logic Controller w/ NEMA 4X Enclosure
- Regulated Purge Flow for Optimum Setting, Regardless of Operating Pressure
- ISO 8573.1 Class 2 -40°F/C Standard Outlet Dewpoint



### FEATURES

- Power Requirements (model specific):
  - 120 VAC, 1 Phase, 60 Hz
  - 230 VAC, 1 Phase, 60 Hz
  - 460 VAC, 3 Phase, 60 Hz
- Maximum Pressure - 150 PSIG Standard
- Maximum Operating Temperature - 120°F / 49°C
- Tower Pressure Gauges & Dew Point Indicators
- Welded Frame Base - Easy Move With Forklift
- OSHA Approved Mufflers
- Desiccant Fill & Drain Ports
- ASME Safety Relief Valves

### OPTIONS

- Alternate Voltages
- EcoTronic Dew Point Demand Control
- Dual Filter & Bypass Packages
- Environment Temperature Protection Kits
- High Pressure (200 PSIG) Models
- Upgraded Controller
- Stainless Steel Control Tube & Fittings
- Bolt-Down Construction

*Call for all Available Options*



[www.AltecAIR.com](http://www.AltecAIR.com)  
**800.521.5351**

**Altec | AIR**  
HRE SERIES  
DUAL TOWER HEAT REGENERATIVE DRYERS

# HRE Series

SPECIFICATIONS & DIMENSIONS

	INLET Flow (SCFM @ 100 PSIG)	Inlet / Outlet Ports (NPT)	Power Requirement	Heater (KW)	Approx. Purge (SCFM)	Dimensions W x D x H (in)	Weight (lbs)
HRE-0100-1	100	1"	120 VAC, 1 Ph, 60 Hz	1.5	8	27 x 30 x 79	550
HRE-0130-1	130				10	27 x 32 x 79	630
HRE-0200-2	200	1-1/2"	230 VAC, 1 Ph, 60 Hz	3.0	15	31 x 36 x 90	940
HRE-0250-2	250				19	31 x 38 x 91	1,018
HRE-0300-4	300				23		1,095
HRE-0400-4	400	2"	460 VAC, 3 Ph, 60 Hz	5.0	30	32 x 40 x 94	1,390
HRE-0550-4	550				41	44 x 49 x 93	1,700
HRE-0650-4	650				49	44 x 52 x 93	1,855
HRE-0800-4	800				60	44 x 52 x 98	2,270
HRE-1000-4	1000				75	52 x 48 x 102	2,900
HRE-1250-4	1250	3" (FLG)	460 VAC, 3 Ph, 60 Hz	12.0	94	96 x 70 x 101	4,180
HRE-1500-4	1500				113	96 x 70 x 101	4,530
HRE-2000-4	2000	4" (FLG)	460 VAC, 3 Ph, 60 Hz	25.0	150	96 x 84 x 121	6,210
HRE-2500-4	2500				185	96 x 84 x 127	6,795
HRE-3000-4	3000				225	90 x 92 x 112	7,620
HRE-4000-4	4000	6" (FLG)	460 VAC, 3 Ph, 60 Hz	38.0	300	117 x 127 x 112	9,565
HRE-5000-4	5000				50.0	133 x 116 x 105	11,055
HRE-6000-4	6000				60.0	145 x 123 x 104	14,125

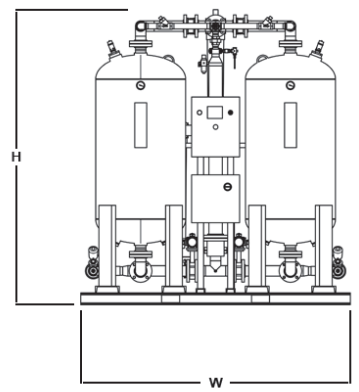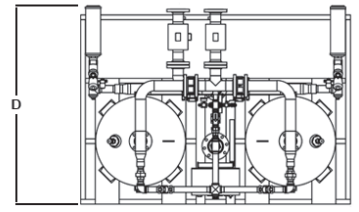

\* Units 4000 SCFM and larger with factory packaged filters are provided on two bases designed to bolt together at installation.

Sizing based on the Compressed Air and Gas Institute CAGI ADF 200 Standard for Compressed Air of 100 PSIG inlet pressure, 100°F inlet temperature and -40° F pressure dew point providing ISO Quality to standard 8573-1 rating 1-2-1 for Compressed Air Quality.


MULTIPLIER TABLES

## Sizing Dryers for Variable Conditions

**Maximum Inlet Flow (-40° F/C PDP)** = **INLET Flow (above)** x **Inlet Pressure Correction Factor (A)** x **Inlet Temp Correction Factor (B)**

Actual Pressure (PSIG)	60	70	80	90	100	110	120	130	140	150
Correction Factor (A)	0.66	0.72	0.82	0.90	1.00	1.07	1.15	1.24	1.33	1.40
Inlet Temp (°F)	80		90		100		110		120	
Correction Factor (B)	1.40		1.32		1.00		0.75		0.58	

MODEL CONFIGURATION

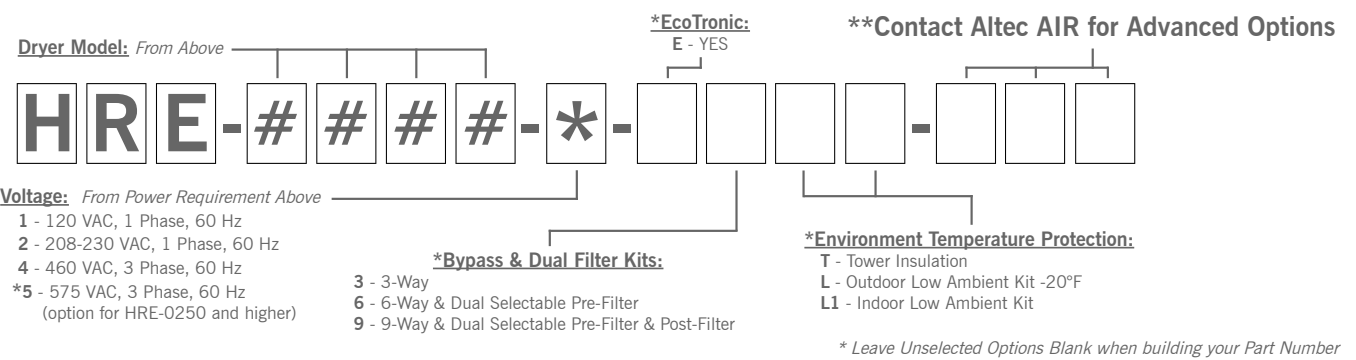

For more complete information on Altec AIR products and services, visit us on the web at [www.AltecAIR.com](http://www.AltecAIR.com). Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec AIR representative for all available options. Altec AIR logo is a registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.  
 © 2022 Altec AIR. All Rights Reserved. SPEC-HRE-0323