

**DIRECT
COOLING**

PROFESSIONAL SERIES

Air technology system.

**COMPACT 2 - 3
ROTARY SCREW COMPRESSORS
COMPACT SERIES**



KTCTM
KOMPAKT TECHNOLOGY COMPRESSOR

COMPACT 2



Grounded with 2,5 liters tank



On tank (90 Lt)



Air trolley




INTEGRATED AIR-END

COMPACT is made up of a state-of-the-art pumping group, the most compact in the field, integrating the main components of a screw compressor (air-end, separator tank, thermostatic and minimum pressure valve, intake valve).



- Greatest energy efficiency
- Designed as a big compressor
- Cooling circuit
- Best performance in just a small amount of space
- Great compactness

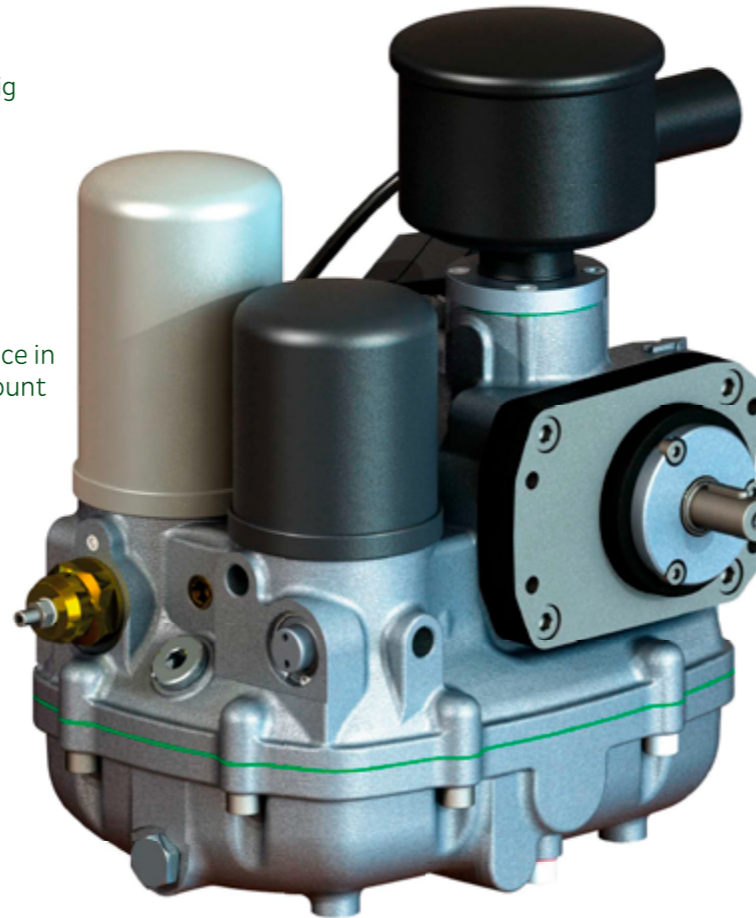

- Electronic controller and load/unload system
- Super silenced
- Turnkey products with an aluminum case
- Fast and economical maintenance
- Anti-condensation system
- Constant and immediate air flow with no big tanks required

COMPACT 3



Grounded



On tank (90 Lt)



Air trolley

COMPACT SERIES

COMPACT stands for an authentic revolution in the field, adopting the technical and technological solutions of an industrial screw compressor on the professional market which, until some time ago, was mainly using piston compressors. Thanks to the Heating System that eliminates the condensate problem, **COMPACT** can also run discontinuously. Moreover, it guarantees more airflow and energy efficiency if compared to a piston compressor with the same motor power.

Compact 2 series

TECHNICAL SPECIFICATIONS OF COMPACT 2 SERIES

Code	Model	Power	Tank	Pressure	Air Flow*	Noise L.**	Voltage	Connection	Dimensions	Weight
EAN										
		kW	Lt	bar	ℓ/min	dB[A]	Volt/Ph/Hz	BSP	L x W x H (cm)	Kg
COMPACT 2 SPECIAL - grounded										
180012039	COMPACT 2 SPECIAL	2,7	2,5	10	270	65	230/1/50	QUICK CONNECTOR	67x40x47	46
180012041	COMPACT 2 SPECIAL	3			290		400/3/50			
COMPACT 2 SPECIAL - on tank										
180012042	COMPACT 2 SPECIAL / 90	2,7	90	10	270	65	230/1/50	G 1/2"	116x44x88	78
180012040	COMPACT 2 SPECIAL / 90	3			290		400/3/50			
COMPACT 2 SPECIAL - trolley										
180012043	COMPACT 2 SPECIAL AR	2,7	2,5	10	270	65	230/1/50	QUICK CONNECTOR	67x55x61	52
180012044	COMPACT 2 SPECIAL AR	3			290		400/3/50			

* Performances measured according to ISO 1217, annex C.
** Noise level measured according to ISO 2151.

Compact 3 series

TECHNICAL SPECIFICATIONS OF COMPACT 3 SERIES

Code	Model	Power	Tank	Pressure	Air Flow*	Noise L.**	Voltage	Connection	Dimensions	Weight
EAN										
		kW	Lt	bar	ℓ/min	dB[A]	Volt/Ph/Hz	BSP	L x W x H (cm)	Kg
COMPACT 3 - grounded										
180022001	COMPACT 3	3,5	-	10	360	69	400/3/50	G 3/8"	55x43x42	45
COMPACT 3 - on tank										
180022020	COMPACT 3/90	3,5	90	10	360	69	400/3/50	G 1/2"	116x44x88	77
COMPACT 3 - trolley										
151022004	COMPACT 3 AR	3,5	7	10	360	69	400/3/50	G 3/8"	76x62x70	71

* Performances measured according to ISO 1217, annex C.
** Noise level measured according to ISO 2151.



KTC S.r.l
Via Palazzon, 70 36051 Creazzo (Vicenza) Italy
T +39 0444-551759 | F +39 0444- 1510104

www.ktc-air.com - info@ktc-air.com