


SPECIFICATIONS	
HORSEPOWER	7.5
OPERATING PRESSURE (PSI)	115-145
AIR DELIVERY (CFM)	19.0
CONTROL SYSTEM	MULTIPLE UNIT CONTROL - AUTO START/STOP
NOISE LEVEL dB(A)	70
AIR OUTLET (BALL VALVE)	1/2" NPT
OPERATING VOLTAGE	3 PHASE, 208-230/460V, 60 Hz
DIMENSIONS (L x W x H)	75 x 32 x 55
APPROX. WEIGHT (LBS)	TBD

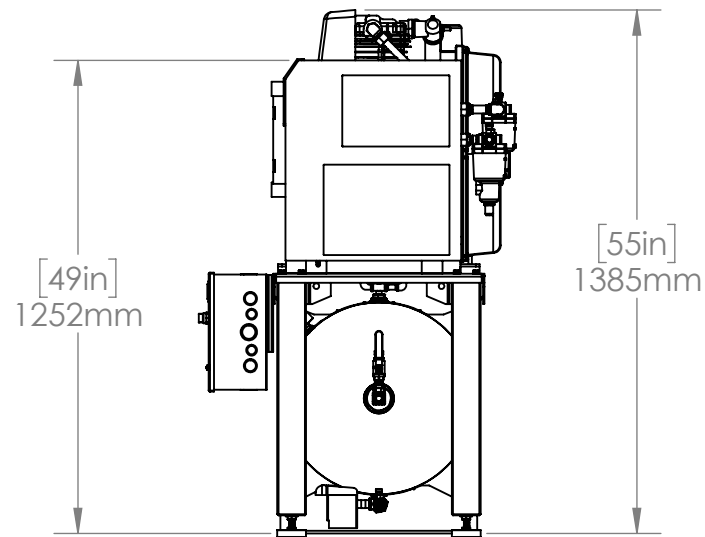

- NOTES:
- 1) COMPRESSOR UNIT MUST BE INSTALLED IN A ROOM ON A FLAT FLOOR
 - 2) COMPRESSOR IS AN AIR COOLED UNIT - ROOM TEMPERATURE MUST NOT EXCEED 104° F
EXHAUST DUCTS OR VENTILATING FAN MUST BE INSTALLED IF ROOM TEMPERATURE EXCEEDS 104° F
 - 3) PROVIDE ADEQUATE SPACE DURING INSTALLATION FOR NECESSARY MAINTENANCE AND REPAIRS
ALLOW A MINIMUM OF 20" ON EACH SIDE AND 24" FROM TOP OF UNIT FROM WALLS
 - 4) CARE MUST BE TAKEN TO INSURE COMPRESSOR UNIT DOES NOT INTAKE HOT AIR OR DUST
 - 5) REFER TO INSTRUCTION MANUAL FOR ELECTRIC WIRING DIAGRAM
 - 6) SPEC IS SUBJECT TO CHANGE WITHOUT NOTICE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ANEST IWATA. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
ANEST IWATA IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DO NOT SCALE DRAWING

	NAME	DATE	<div>ANEST IWATA Air Engineering Inc.</div> <div></div> <div>TITLE: OFT-7.5H-FRD-80 OIL-FREE PISTON UNIT TANK MOUNT COMPRESSOR & DRYER</div>	
DRAWN	BSC	01/25/22		
CHECKED	TD	01/25/22		
ENG APPR.				
MFG APPR.				
	Q.A.		COMMENTS:	
SIZE	DWG. NO.	REV		
B	OFT-7.5H-FRD-80-Txxx			
SCALE: 1:20		WEIGHT:	SHEET 1 OF 1	