
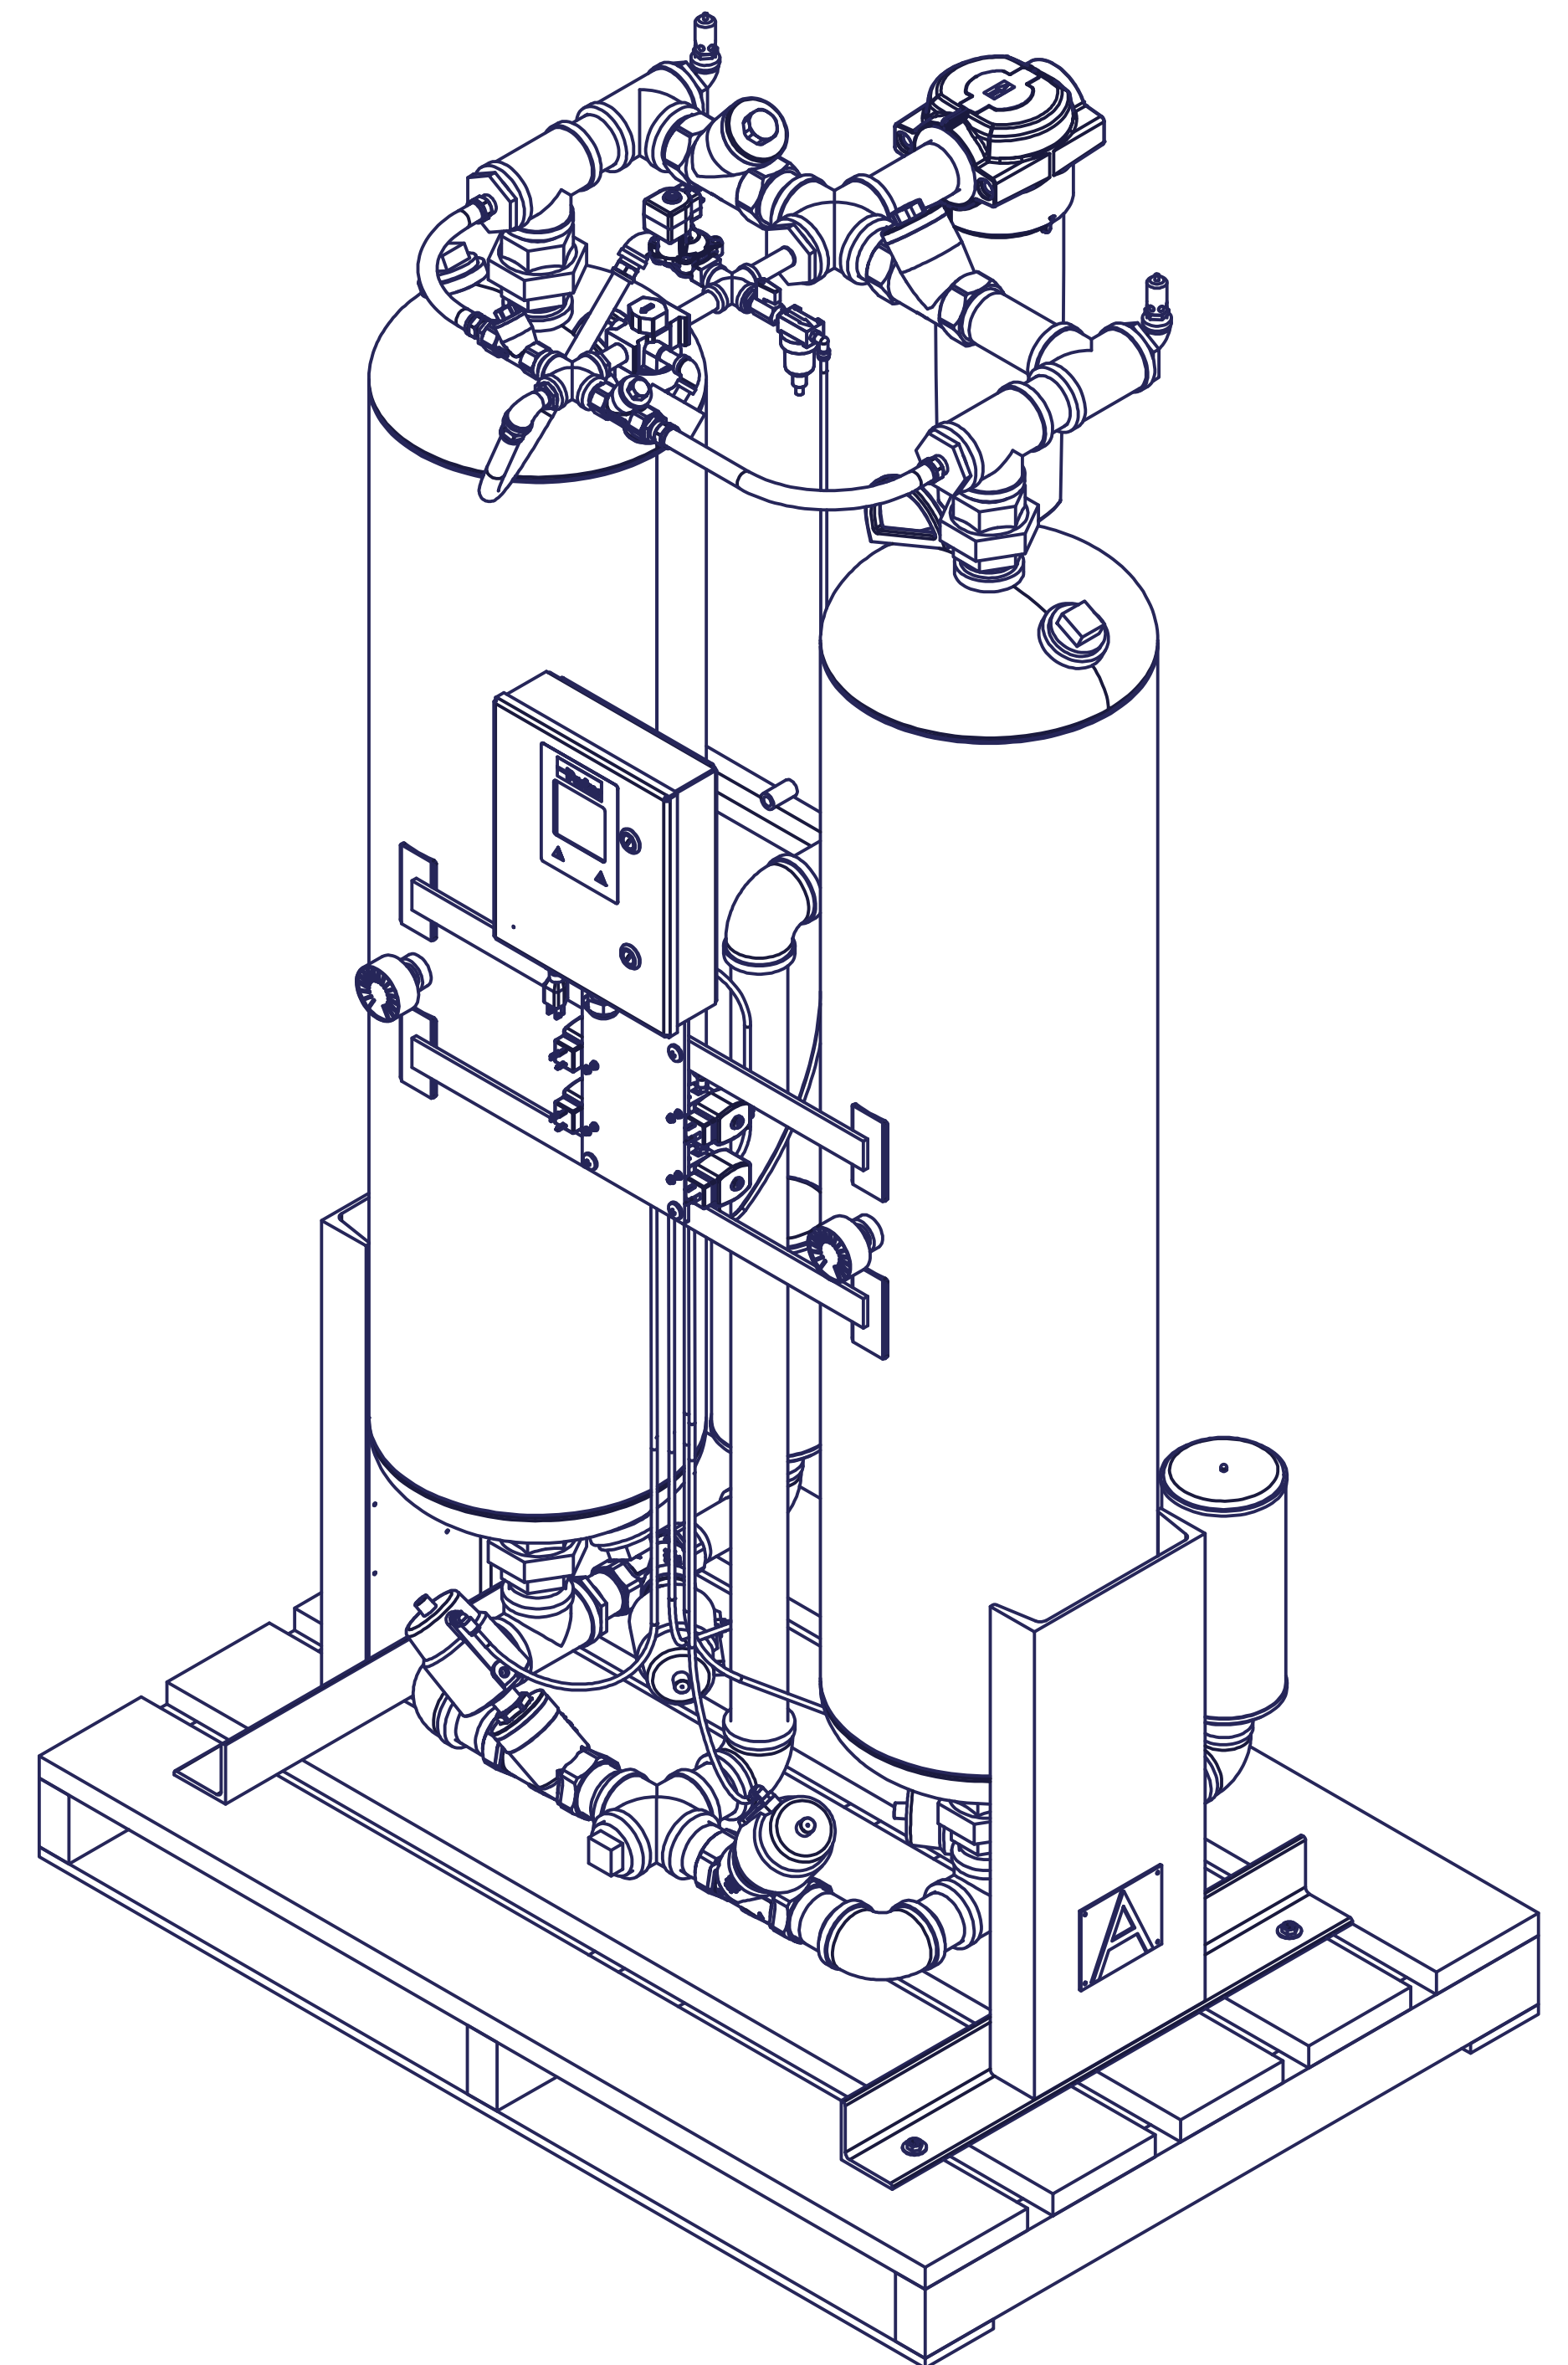
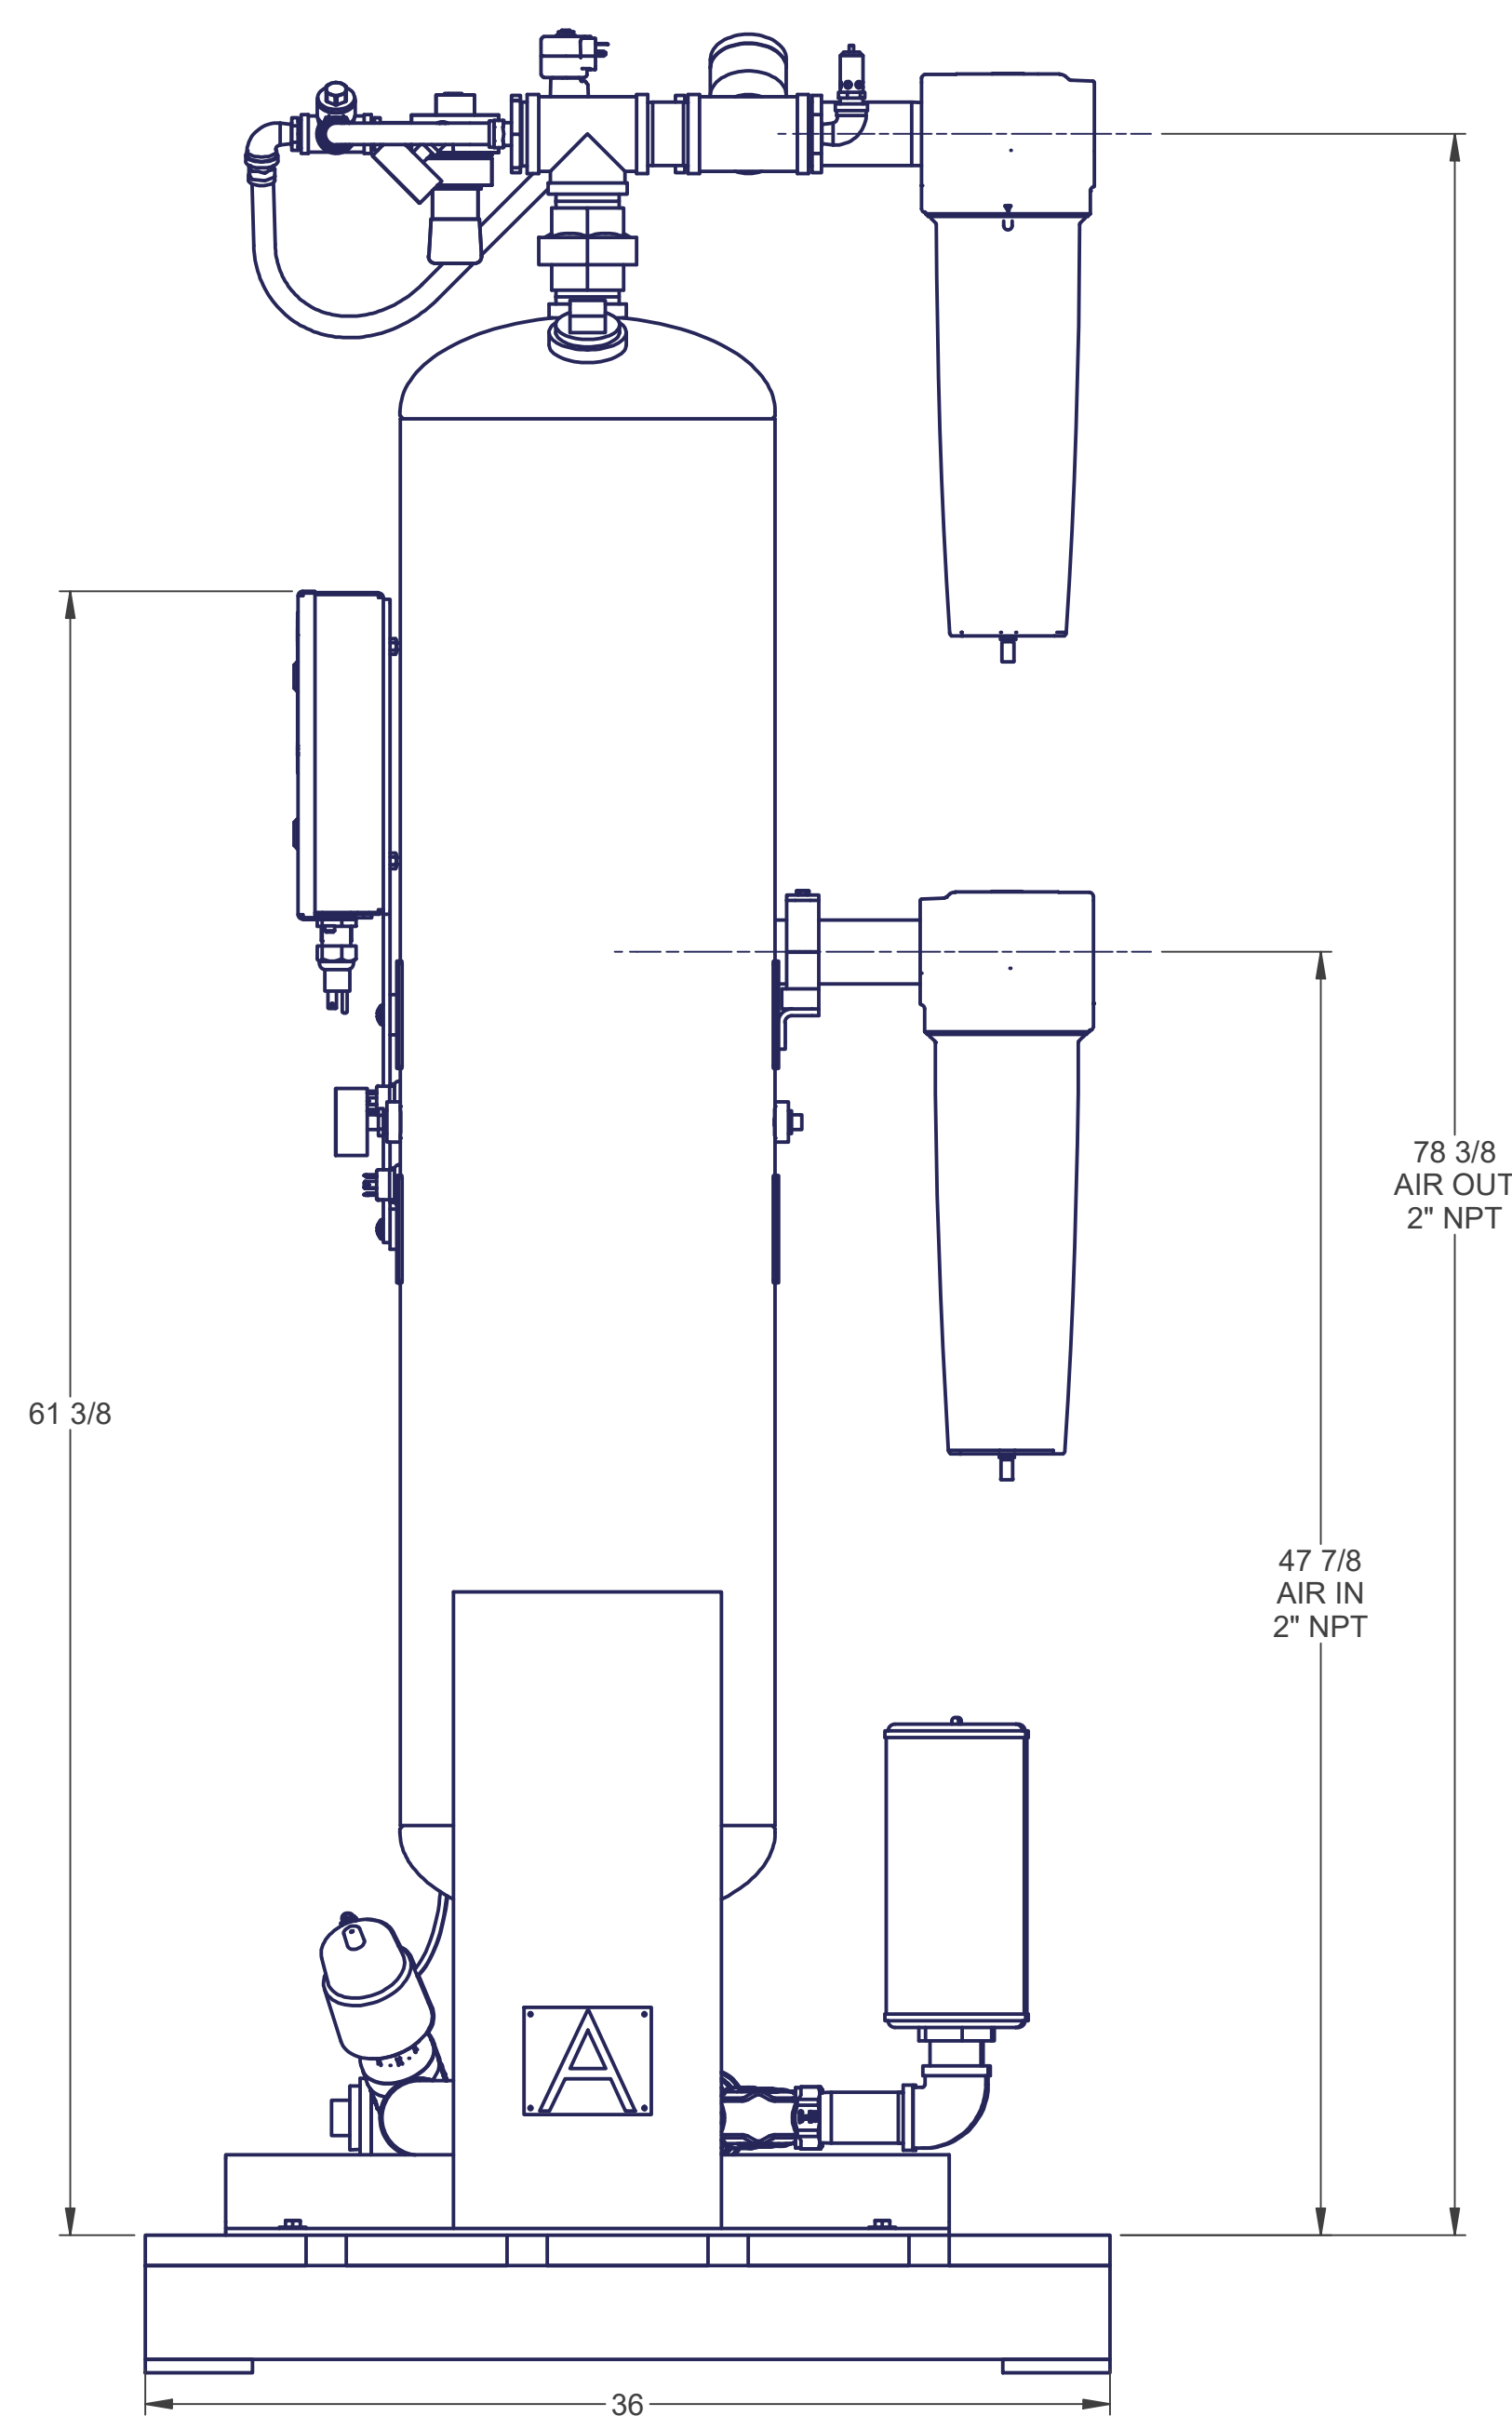


TW0400-FB1NNF	
FLOW CAPACITY	400 CFM
MAX INLET AIR TEMP.	100°F
MAX/MIN AMBIENT AIR TEMP.	100/40°F
POWER	120/1/60
DRYER FLA	2.0A
MAX OUTLET AIR TEMP	150 °F
MAX FUSE	2.0A
SCCR	N/A
EQUIPMENT OUTDOOR RATED	N
MIN SPACING TO COMBUSTIBLE SURFACES	0 INCHES

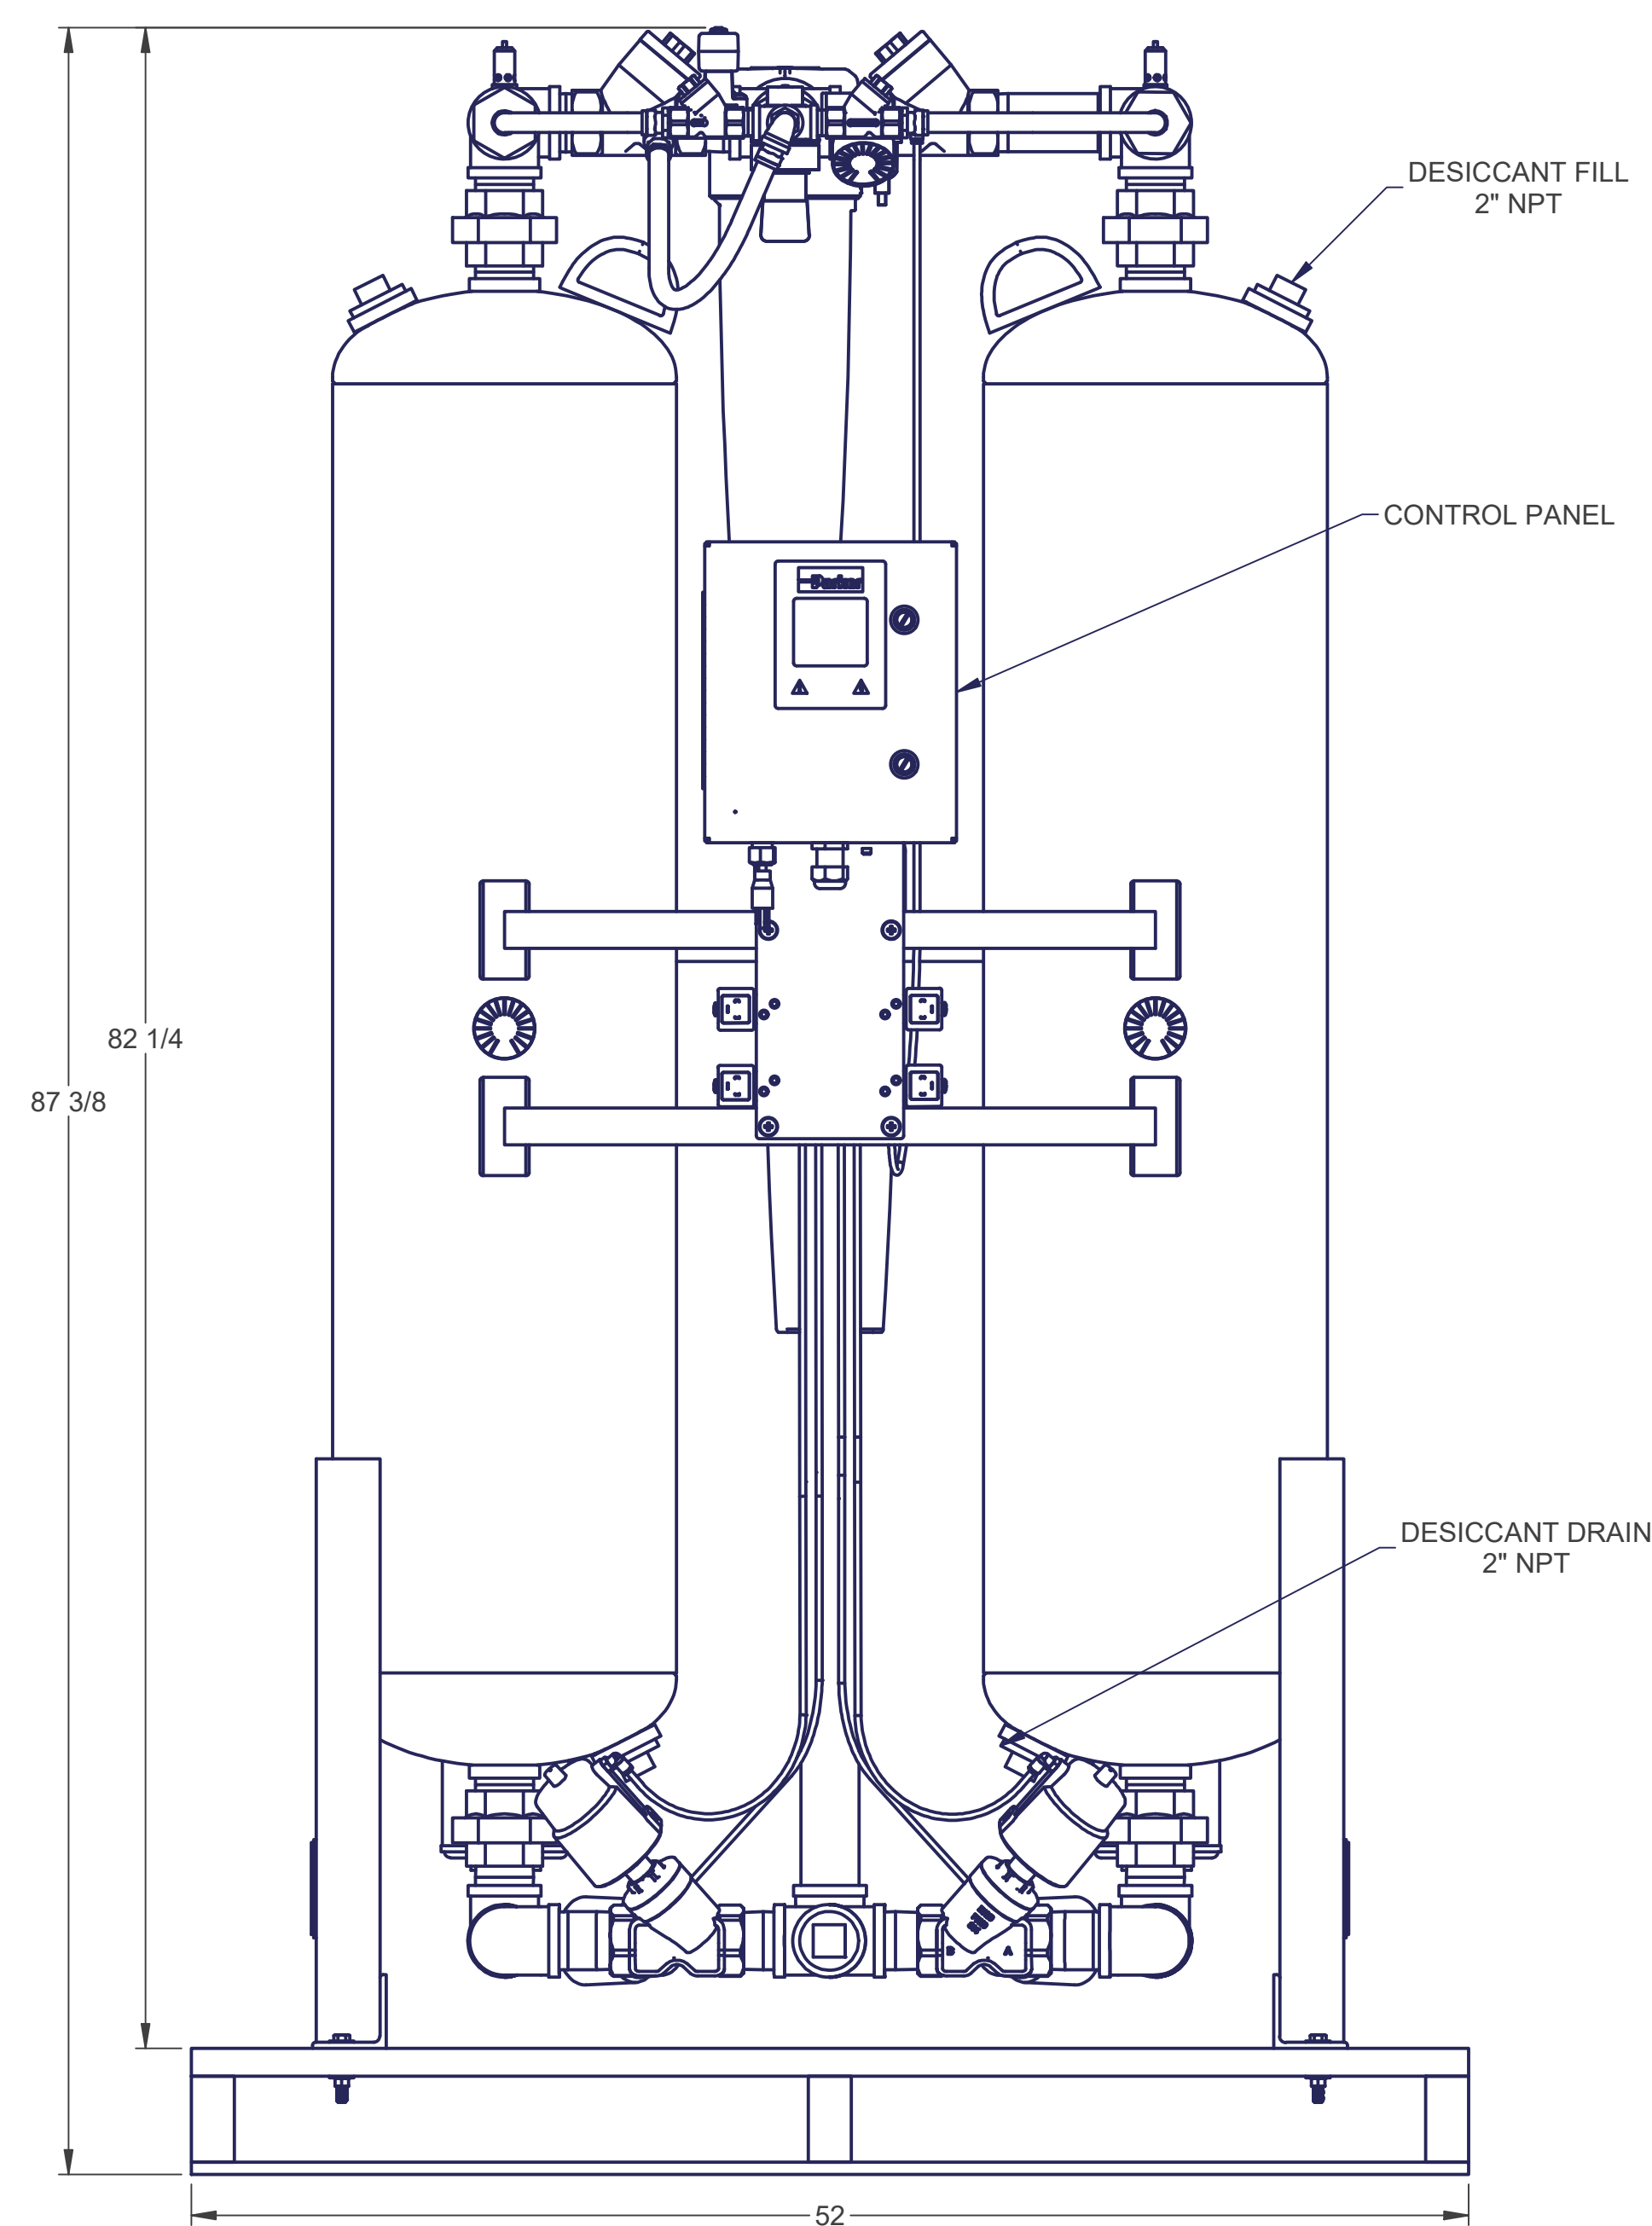

- NOTES:
1. ALL DIMENSIONS ARE APPROXIMATE AND SUBJECT TO CHANGE UNLESS CERTIFIED.
 2. SEE MANUAL FOR COMPLETE SPECIFICATIONS, CAPACITIES, INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS, & SAFETY PRECAUTIONS.
 3. PROVIDE MINIMUM 4" ON EACH SIDE OF DRYER AND OVERHEAD FOR SERVICE AND MAINTENANCE.
 4. DO NOT OPERATE WITHOUT PROPER PURGE FLOW.
 5. BYPASS VALVES MUST BE BUBBLE TIGHT.
 6. DO NOT SURGE DESICCANT BED OR FILTERS.
 7. CAPACITY AND SIZING BASED ON CAGI STANDARD, 100 °F INLET, 100 PSI INLET, 68 °F AMBIENT.

OPERATING WEIGHT	1626 LB.	NEMA RATING	12	PURGE FLOW	60 CFM
DESICCANT AMOUNT	460 LB.	CONTROLS	BASIC	PURGE SET PRESSURE	31 PSIG
DESICCANT FILLER	YES	CONTROL TUBING	NYLON	PAINT	PAINT-TW-3G

MATERIAL		PROPERTY OF PARKER-HANNIFIN CORPORATION THIS DOCUMENT CONTAINS INFORMATION THAT IS CONFIDENTIAL AND PROPRIETARY TO PARKER HANNIFIN, AND IS FURNISHED ON THE UNDERSTANDING THAT THE DOCUMENT AND THE INFORMATION IT CONTAINS WILL NOT BE COPIED, REPRODUCED, LOANED, RENTED, USED OR USED FOR ANY PURPOSE OTHER THAN CONDUCTING BUSINESS WITH PARKER, AND WILL BE RETURNED AND ANY FURTHER USE DISCONTINUED UPON REQUEST BY PARKER. COPYRIGHT IS THE FIRST YEAR INDICATED ON THIS DOCUMENT. ALL RIGHTS RESERVED.		TUBING		DRAWN DATE 2RF 3/8/2023		 PARKER HANNIFIN LANCASTER, NY 14086 USA	
		USE CORRESPONDING TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE		GENERAL ARRANGEMENT: 400 SCFM HEATLESS DESICCANT DRYER			
PART NUMBER		USE CORRESPONDING TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE		GENERAL ARRANGEMENT: 400 SCFM HEATLESS DESICCANT DRYER			
TW0400-FB11NMF		WELDED PARTS AND SALES DRAWINGS	SHEET METAL PARTS	MACHINED PARTS 2 PLACE (.001) ± .01 3 PLACE (.001) ± .005 ANGLES ± 1/2° 1/2" SURFACE FINISH	SIZE	SHEET	DRAWING NUMBER	REVISION	
		FRACTIONS: 1/16 ANGLES: ± 3/4	ALL TOLERANCES: ± 1/64 ANGLES: ± 2°		D	1 OF 1	TW0400-FB11NMF	-	