

| | | | | | | | HORIZONTAL A | AIR R | |
|--|--|------------|--------|-----------|----|------|--------------|-------------------|--|
| III DIV 1 ASME CODE) | | | | | | | | CUSTOMER STOCK | |
| G AND MAY NOT BE BASIS FOR DESIGN N FROM SPVG. | | C12 REV | ISSUED | SCRIPTION | BY | DATE | | TYPE ASME | |
| | | | | | | | | | |

(BUILT IN ACCORDANCE WITH LATEST EDITION OF SECTION VIII DIV 1 ASME CODE) THIS DRAWING & SPECIFICATIONS ARE PROPERTY OF SPVG AND MAY NOT BE

THIS DRAWING & SPECIFICATIONS ARE PROPERTY OF SPVG AND MAY NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR PART, AS A BASIS FOR DESIGN MANUFACTURE OR SALE WITHOUT PRIOR PERMISSION FROM SPVG.

| ASME | | SIZE: B | SHEET 1 OF 1 | | | |
|----------------------|-----|---------|------------------|------------|-------------|------|
| | | TYPE | 9/19/2016 | 10/11/2016 | A10030 | |
| CK | | | КАТ | DMM | A10030 | C12 |
| R | | | DRAWN | CHECKED | DRAWING NO | REV |
| IZONTAL AIR RECEIVER | | | | | SSEL GROUP | |
| | CRN | | | | M3329 | 9.5C |
| SHIPPING WEIGHT | | | | | 196 | LBS |
| CAPACITY | | | | APPRO | DX 60 GALL | ONS |
| MAWP MDMT | | | -20°F AT 200 PSI | | | |
| | | | | 20 | 0 PSI AT 45 | 50°F |


DESIGN INFORMATION

VALUE

20 I.D.

SPECIFICATION DIAMETER O.D./I.D.

TITLE

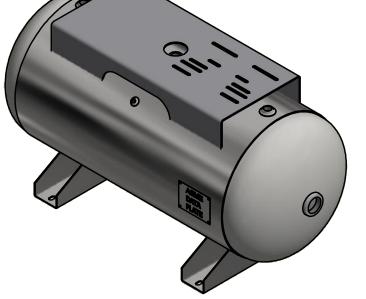

| NOZZLE CHART | | | | |
|--------------|----------|--|--|--|
| NOZZLE ID | NPT SIZE | | | |
| N1 | 1/4 | | | |
| N2 | 1/2 | | | |
| N3 | 3/4 | | | |
| N4 | 1 | | | |
| N5 | 2 | | | |